

您值得信赖的刀具专家！
Your Reliable Expert of Machining Tools.



东莞市钰泽机械工具有限公司
YUZE(DONGGUAN)MACHINING TOOLS CO.,LTD.

东莞市长安钰鼎五金刀具店
Dongguan Changan YuDing Hardware Tool Store

YUZE MACHINING TOOLS

CATALOGUE

MILLING TOOLS

切削工具样本 Cutting Tools Catalog

Milling Cutter | Milling Holder
Modular Milling Cutter



东莞市钰泽机械工具有限公司
YUZE(DONGGUAN)MACHINING TOOLS CO.,LTD.

Add: 东莞市长安镇锦厦社区长安商贸城五金广场H栋5-6号
Room 6, Building H, Changan Commercial Center,
Changan Town, Dongguan city, Guangdong province, PRC
Tel: +86 0769-21018541
Fax: +86 0769-81075581
QQ: 569075441 408279127
E-mail: Scott.Jiang@yuzemachinery.com
Web: <http://www.yuzemachinery.com>
<http://www.yudingtools.com>



Vol.03
2023.10-


铣刀杆

Milling Tools




MXG 高进给铣刀杆

MGX Hi-feed Milling Cutter Holder

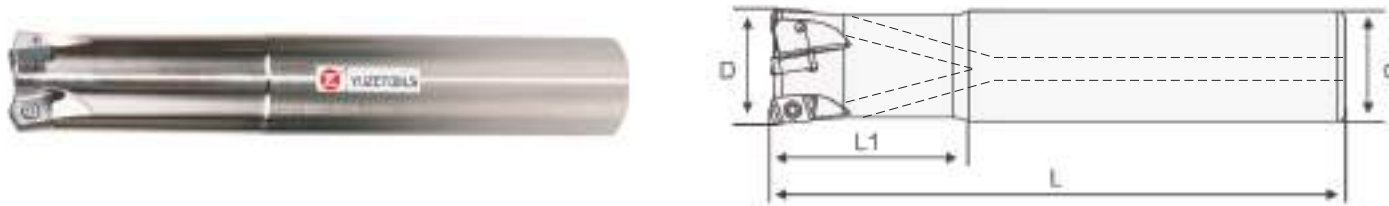

技术参数/Technical Parameters




类型 Type	MXG 高进给铣刀杆 MGX Hi-feed Milling Cutter Holder	直径大小 Diameter size	16~26mm
螺丝 Screw	M3	适用刀粒 Inserts	ENMU1004
材质 Material	特殊合金钢 Special Alloy Steel	冷却方式 Cooling Method	冷却液孔 Coolant Hole

规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	T	L			
MXG-16D16d120L-2T-C	16	16	2	120	ENMU1004	M3.0	T10
MXG-16D16d160L-2T-C	16	16	2	160			
MXG-16D16d200L-2T-C	16	16	2	200			
MXG-17D16d120L-2T-C	17	16	2	120			
MXG-17D16d160L-2T-C	17	16	2	160			
MXG-17D16d200L-2T-C	17	16	2	200			
MXG-20D20d150L-3T-C	20	20	3	150			
MXG-20D20d200L-3T-C	20	20	3	200			
MXG-21D20d160L-3T-C	21	20	3	160			
MXG-21D20d200L-3T-C	21	20	3	200			
MXG-25D25d150L-4T-C	25	25	4	150			
MXG-25D25d200L-4T-C	25	25	4	200			
MXG-26D25d250L-4T-C	26	25	4	250			
MXG-26D25d150L-4T-C	26	25	4	150			
MXG-26D25d200L-4T-C	26	25	4	200			
MXG-26D25d250L-4T-C	26	25	4	250			


刀杆刀盘
Milling Cutter

MXG 高进给铣刀杆

MGX Hi-feed Milling Cutter Holder

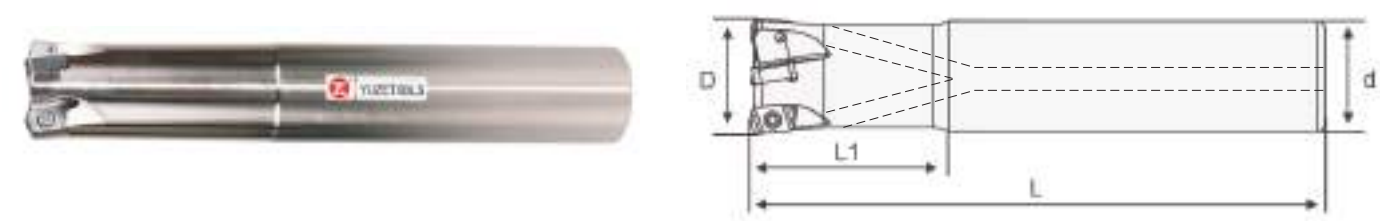

技术参数/Technical Parameters




类型 Type	MXG 高进给铣刀杆 MGX Hi-feed Milling Cutter Holder	直径大小 Diameter size	28~35mm
螺丝 Screw	M3	适用刀粒 Inserts	ENMU1004
材质 Material	特殊合金钢 Special Alloy Steel	冷却方式 Cooling Method	冷却液孔 Coolant Hole


规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	T	L			
MXG-28D25d150L-4T-C	28	25	4	150	ENMU1004	M3.0	T10
MXG-28D25d200L-4T-C	28	25	4	200			
MXG-32D32d160L-5T-C	32	32	5	160			
MXG-32D32d200L-5T-C	32	32	5	200			
MXG-32D32d250L-5T-C	32	32	5	250			
MXG-33D32d160L-5T-C	33	32	5	160			
MXG-33D32d200L-5T-C	33	32	5	200			
MXG-33D32d250L-5T-C	33	32	5	250			
MXG-35D32d160L-5T-C	35	32	5	160			
MXG-35D32d200L-5T-C	35	32	5	200			
MXG-35D32d250L-5T-C	35	32	5	250			

MFH03 高进给铣刀杆

MFH03 Hi-feed Milling Cutter Holder

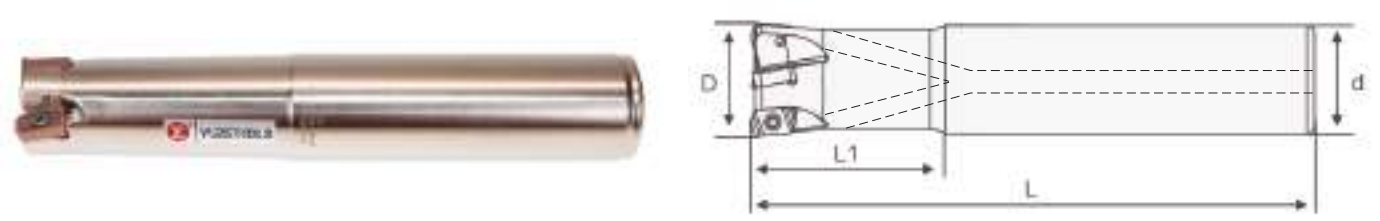

技术参数/Technical Parameters




类型 Type	MFH03 高进给铣刀杆 MFH03 Hi-feed Milling Cutter Holder	直径大小 Diameter size	16~26mm
螺丝 Screw	M3	适用刀粒 Inserts	LOGU030310ER
材质 Material	特殊合金钢 Special Alloy Steel	冷却方式 Cooling Method	冷却液孔 Coolant Hole


规格 Specification		尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
		D	d	T	L			
MFH03R-16D16d120L-2T-C	Coolant	16	16	2	120	LOGU0303	M3.0	T10
MFH03R-16D16d160L-2T-C	Coolant	16	16	2	160			
MFH03R-16D16d200L-2T-C	Coolant	16	16	2	200			
MFH03R-17D16d120L-2T-C	Coolant	17	16	2	120			
MFH03R-17D16d160L-2T-C	Coolant	17	16	2	160			
MFH03R-17D16d200L-2T-C	Coolant	17	16	2	200			
MFH03R-20D20d150L-3T-C	Coolant	20	20	3	150			
MFH03R-20D20d200L-3T-C	Coolant	20	20	3	200			
MFH03R-21D20d160L-3T-C	Coolant	21	20	3	160			
MFH03R-21D20d200L-3T-C	Coolant	21	20	3	200			
MFH03R-25D25d150L-4T-C	Coolant	25	25	4	150			
MFH03R-25D25d200L-4T-C	Coolant	25	25	4	200			
MFH03R-26D25d250L-4T-C	Coolant	26	25	4	250			
MFH03R-26D25d150L-4T-C	Coolant	26	25	4	150			
MFH03R-26D25d200L-4T-C	Coolant	26	25	4	200			
MFH03R-26D25d250L-4T-C	Coolant	26	25	4	250			

MFH03 高进给铣刀杆

MFH03 Hi-feed Milling Cutter Holder

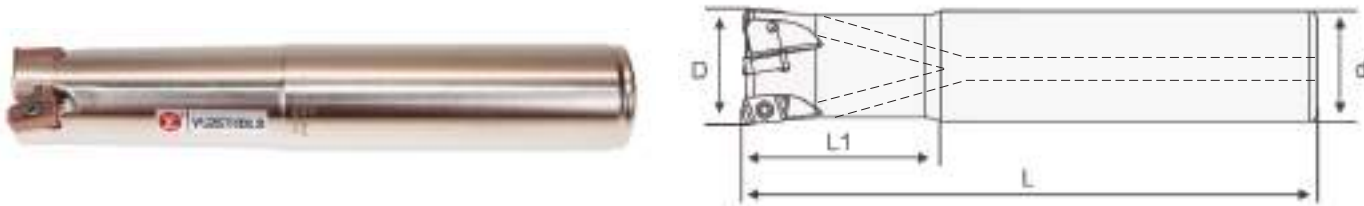

技术参数/Technical Parameters




类型 Type	MFH03 高进给铣刀杆 MFH03 Hi-feed Milling Cutter Holde	直径大小 Diameter size	28~35mm
螺丝 Screw	M3	适用刀粒 Inserts	LOGU030310ER
材质 Material	特殊合金钢 Special Alloy Steel	冷却方式 Cooling Method	冷却液孔 Coolant Hole


规格 Specification		尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
		D	d	T	L			
MFH03R-28D25d150L-4T-C	Coolant	28	25	4	150	LOGU0303	M3.0	T10
MFH03R-28D25d200L-4T-C	Coolant	28	25	4	200			
MFH03R-32D32d160L-5T-C	Coolant	32	32	5	160			
MFH03R-32D32d200L-5T-C	Coolant	32	32	5	200			
MFH03R-32D32d250L-5T-C	Coolant	32	32	5	250			
MFH03R-33D32d160L-5T-C	Coolant	33	32	5	160			
MFH03R-33D32d200L-5T-C	Coolant	33	32	5	200			
MFH03R-33D32d250L-5T-C	Coolant	33	32	5	250			
MFH03R-35D32d160L-5T-C	Coolant	35	32	5	160			
MFH03R-35D32d200L-5T-C	Coolant	35	32	5	200			
MFH03R-35D32d250L-5T-C	Coolant	35	32	5	250			

MFH03 高进给铣刀杆

MFH03 Hi-feed Milling Cutter Holder

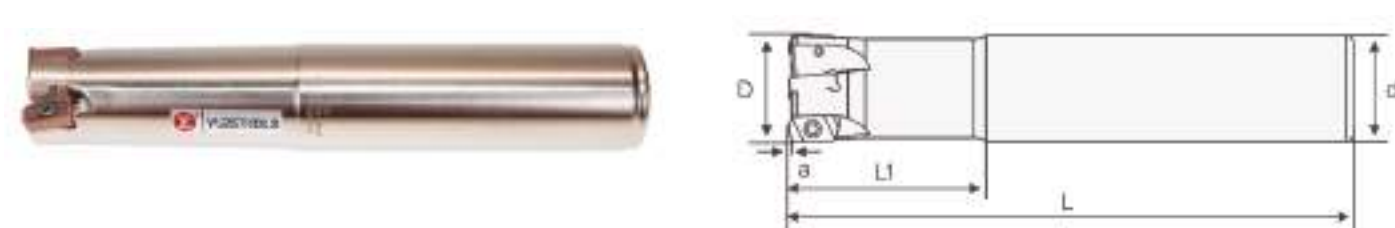

技术参数/Technical Parameters



类型 Type	MFH03 高进给铣刀杆 MFH03 Hi-feed Milling Cutter Holder	直径大小 Diameter size	16~32mm
螺丝 Screw	M3	适用刀粒 Inserts	LOGU030310ER
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~5T


规格 Specification		尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
		D	d	L1	L			
MFH03-D16-C16-100-2T		16	16	30	100	LOGU030310ER	M3	T10
MFH03-D16-C16-150-2T		16	16	50	160			
MFH03-D17-C16-100-2T		17	16	20	100			
MFH03-D17-C16-150-2T		17	16	30	160			
MFH03-D20-C20-130-3T		20	20	50	100			
MFH03-D20-C20-160-3T		20	20	80	160			
MFH03-D21-C20-130-3T		21	20	25	130			
MFH03-D21-C20-160-3T		21	20	25	160			
MFH03-D25-C25-140-4T		25	25	60	130			
MFH03-D25-C25-180-4T		26	25	100	160			
MFH03-D26-C25-140-4T		26	25	30	140			
MFH03-D26-C25-180-4T		26	25	30	180			
MFH03-D30-C25-160-3T		30	25	30	160			
MFH03-D32-C32-160-5T		32	32	70	160			
MFH03-D32-C32-200-5T		32	32	120	200			

EXN03R 高进给铣刀杆
EXN03R Hi-feed Milling Holder



技术参数/Technical Parameters

类型 Type	EXN03R 高进给铣刀杆 EXN03R Hi-feed Milling Holder	直径大小 Diameter size	16~25mm
螺丝 Screw	M2.5	适用刀粒 Inserts	LNMU0303
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~4T




规格 Specification	尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
EXN03R-D16-C16-100-2T	16	16	30	100	LNMU0303	M2.5	T8
EXN03R-D16-C16-160-2T	16	16	35	160			
EXN03R-D17-C16-100-2T	17	16	30	100			
EXN03R-D17-C16-160-2T	17	16	30	160			
EXN03R-D18-C16-100-2T	18	16	30	100			
EXN03R-D18-C16-160-2T	18	16	30	160			
EXN03R-D20-C20-130-3T	20	20	50	130			
EXN03R-D20-C20-160-3T	20	20	60	160			
EXN03R-D21-C20-130-3T	21	20	50	130			
EXN03R-D21-C20-160-3T	21	20	50	160			
EXN03R-D22-C20-130-3T	22	20	50	130			
EXN03R-D25-C25-140-4T	25	25	60	140			
EXN03R-D25-C25-160-4T	25	25	60	160			
EXN03R-D25-C25-200-4T	25	25	80	200			

EXN03R 高进给铣刀杆
EXN03R Hi-feed Milling Holder



技术参数/Technical Parameters


类型 Type	EXN03R 高进给铣刀杆 EXN03R Hi-feed Milling Holder	直径大小 Diameter size	26~35mm
螺丝 Screw	M2.5	适用刀粒 Inserts	LNMU0303
材质 Matefia	特殊合金钢 Special Alloy Steel	刃数 Flutes	4~5T




规格 Specification	尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
EXN03R-D26-C25-140-4T	26	25	60	140	LNMU0303	M2.5	T8
EXN03R-D26-C25-160-4T	26	25	60	160			
EXN03R-D26-C25-200-4T	26	25	60	200			
EXN03R-D28-C25-140-4T	28	25	40	140			
EXN03R-D28-C25-200-4T	28	25	40	200			
EXN03R-D30-C25-160-5T	30	25	40	160			
EXN03R-D30-C25-200-5T	30	25	40	200			
EXN03R-D30-C32-160-5T	30	32	70	150			
EXN03R-D30-C32-200-5T	30	30	80	200			
EXN03R-D32-C32-150-5T	32	32	70	150			
EXN03R-D32-C32-200-5T	32	32	80	200			
EXN03R-D35-C32-150-5T	35	32	40	150			
EXN03R-D35-C32-200-5T	35	32	40	200			

TEBL 高进给铣刀杆

TEBL Hi-feed Milling Cutter

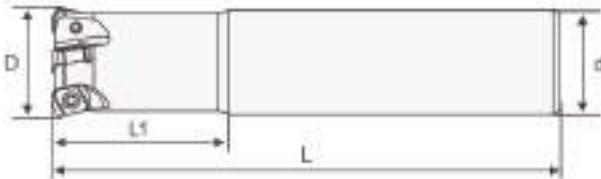

技术参数/Technical Parameters




类型 Type	TEBL 高进给铣刀杆 TEBL Hi-feed Milling Holder	直径大小 Diameter size	16~40mm
螺丝 Screw	M2.5/M3.5	适用刀粒 Inserts	BLMP0603、BLMP0904R
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	3~5T


规格 Specification	尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
TEBL06-16-C20-40-150	16	20	40	150	BLMP0603	M2.5	T8
TEBL06-16-C16-40-150	16	16	40	150			
TEBL06-17-C16-30-150	17	16	30	150			
TEBL06-20-C20-50-150	20	20	50	150			
TEBL06-21-C20-35-150	21	20	35	150			
TEBL06-25-C25-30-180	25	25	30	180			
TEBL06-26-C25-40-180	26	25	40	180			
TEBL06-32-C32-120-200	32	32	120	200			
TEBL06-33-C32-150-200	33	33	50	200	BLMP0904R	M3.5	T15
TEBL09-25-C25-160-3T	25	25	60	160			
TEBL09-26-C25-160-3T	26	25	30	160			
TEBL09-30-C32-160-3T	30	32	60	160			
TEBL09-32-C32-160-3T	32	32	60	160			
TEBL09-33-C32-180-4T	33	32	40	180			
TEBL09-35-C32-180-4T	35	32	35	180			
TEBL09-40-C32-180-5T	40	32	45	180			

TEBL 高进给铣刀杆

TEBL Hi-feed Milling Cutter

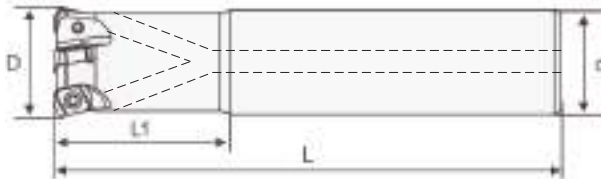

技术参数/Technical Parameters




类型 Type	TEBL 高进给铣刀杆 TEBL Hi-feed Milling Holder	直径大小 Diameter size	16~26mm
螺丝 Screw	M2.5	适用刀粒 Inserts	BLMP0603R
材质 Material	特殊合金钢 Special Alloy Steel	冷却方式 Cooling Method	冷却液孔 Coolant Hole


规格 Specification		尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
		D	d	T	L			
TEBL-16D16d120L-2T-C	Coolant	16	16	2	120	BLMP0603R	M2.5	T8
TEBL-16D16d160L-2T-C	Coolant	16	16	2	160			
TEBL-16D16d200L-2T-C	Coolant	16	16	2	200			
TEBL-17D16d120L-2T-C	Coolant	17	16	2	120			
TEBL-17D16d160L-2T-C	Coolant	17	16	2	160			
TEBL-17D16d200L-2T-C	Coolant	17	16	2	200			
TEBL-20D20d150L-3T-C	Coolant	20	20	3	150			
TEBL-20D20d200L-3T-C	Coolant	20	20	3	200			
TEBL-21D20d160L-3T-C	Coolant	21	20	3	160			
TEBL-21D20d200L-3T-C	Coolant	21	20	3	200			
TEBL-25D25d150L-4T-C	Coolant	25	25	4	150			
TEBL-25D25d200L-4T-C	Coolant	25	25	4	200			
TEBL-26D25d250L-4T-C	Coolant	26	25	4	250			

EXN03R 高进给铣刀杆

EXN03R Hi-feed Milling Holder

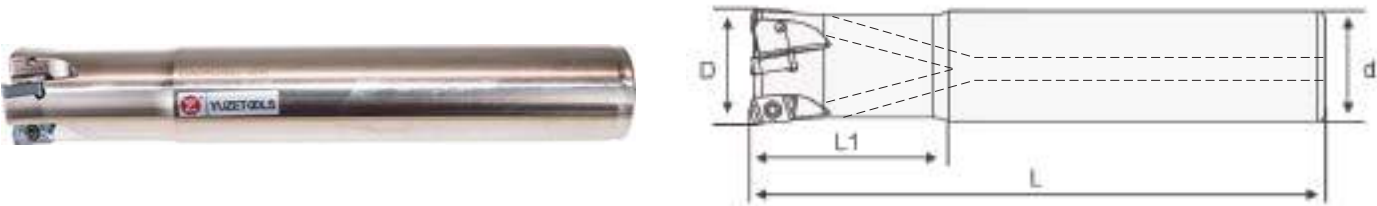

技术参数/Technical Parameters




类型 Type	EXN03R 高进给铣刀杆 EXN03R Hi-feed Milling Holder	直径大小 Diameter size	16~26mm
螺丝 Screw	M2.5	适用刀粒 Inserts	LNMU0303
材质 Material	特殊合金钢 Special Alloy Steel	冷却方式 Cooling Method	冷却液孔 Coolant Hole


规格 Specification		尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
		D	d	L1	L			
EXN03R-16D16d120L-2T-C	Coolant	16	16	2	120	LNMU0303	M2.5	T8
EXN03R-16D16d160L-2T-C	Coolant	16	16	2	160			
EXN03R-16D16d200L-2T-C	Coolant	16	16	2	200			
EXN03R-17D16d120L-2T-C	Coolant	17	16	2	120			
EXN03R-17D16d160L-2T-C	Coolant	17	16	2	160			
EXN03R-17D16d200L-2T-C	Coolant	17	16	2	200			
EXN03R-20D20d150L-3T-C	Coolant	20	20	3	150			
EXN03R-20D20d200L-3T-C	Coolant	20	20	3	200			
EXN03R-21D20d160L-3T-C	Coolant	21	20	3	160			
EXN03R-21D20d200L-3T-C	Coolant	21	20	3	200			
EXN03R-25D25d150L-4T-C	Coolant	25	25	4	150			
EXN03R-25D25d200L-4T-C	Coolant	25	25	4	200			
EXN03R-26D25d250L-4T-C	Coolant	26	25	4	250			

EXN03R 高进给铣刀杆

EXN03R Hi-feed Milling Holder

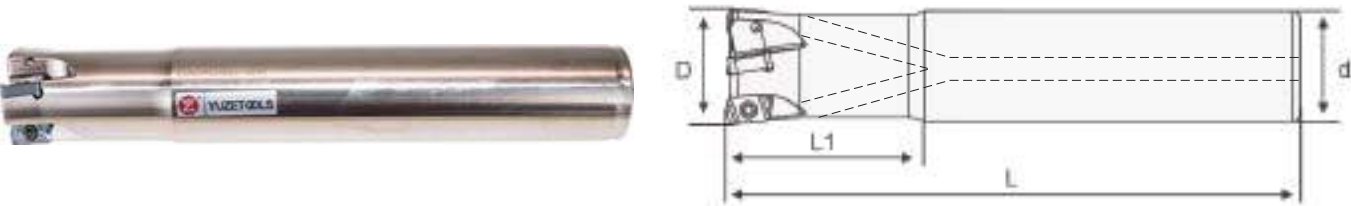

技术参数/Technical Parameters




类型 Type	EXN03R 高进给铣刀杆 EXN03R Hi-feed Milling Holder	直径大小 Diameter size	26~35mm
螺丝 Screw	M2.5	适用刀粒 Inserts	LNMU0303
材质 Material	特殊合金钢 Special Alloy Steel	冷却方式 Cooling Method	冷却液孔 Coolant Hole

规格 Specification		尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
		D	d	L1	L			
EXN03R-26D25d150L-4T-C	Coolant	26	25	4	150	LNMU0303	M2.5	T8
EXN03R-26D25d200L-4T-C	Coolant	26	25	4	200			
EXN03R-26D25d250L-4T-C	Coolant	26	25	4	250			
EXN03R-28D25d150L-4T-C	Coolant	28	25	4	150			
EXN03R-28D25d200L-4T-C	Coolant	28	25	4	200			
EXN03R-32D32d160L-5T-C	Coolant	32	32	5	160			
EXN03R-32D32d200L-5T-C	Coolant	32	32	5	200			
EXN03R-32D32d250L-5T-C	Coolant	32	32	5	250			
EXN03R-33D32d160L-5T-C	Coolant	33	32	5	160			
EXN03R-33D32d200L-5T-C	Coolant	33	32	5	200			
EXN03R-33D32d250L-5T-C	Coolant	33	32	5	250			
EXN03R-35D32d160L-5T-C	Coolant	35	32	5	160			
EXN03R-35D32d200L-5T-C	Coolant	35	32	5	200			
EXN03R-35D32d250L-5T-C	Coolant	35	32	5	250			

TEBL 高进给铣刀杆
TEBL Hi-feed Milling Cutter




技术参数/Technical Parameters




类型 Type	TEBL 高进给铣刀杆 TEBL Hi-feed Milling Holder	直径大小 Diameter size	26~35mm
螺丝 Screw	M2.5	适用刀粒 Inserts	BLMP0603R
材质 Material	特殊合金钢 Special Alloy Steel	冷却方式 Cooling Method	冷却液孔 Coolant Hole

规格 Specification		尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
		D	d	T	L			
TEBL-26D25d150L-4T-C	Coolant	26	25	4	150	BLMP0603R	M2.5	T8
TEBL-26D25d200L-4T-C	Coolant	26	25	4	200			
TEBL-26D25d250L-4T-C	Coolant	26	25	4	250			
TEBL-28D25d150L-4T-C	Coolant	28	25	4	150			
TEBL-28D25d200L-4T-C	Coolant	28	25	4	200			
TEBL-32D32d160L-5T-C	Coolant	32	32	5	160			
TEBL-32D32d200L-5T-C	Coolant	32	32	5	200			
TEBL-32D32d250L-5T-C	Coolant	32	32	5	250			
TEBL-33D32d160L-5T-C	Coolant	33	32	5	160			
TEBL-33D32d200L-5T-C	Coolant	33	32	5	200			
TEBL-33D32d250L-5T-C	Coolant	33	32	5	250			
TEBL-35D32d160L-5T-C	Coolant	35	32	5	160			
TEBL-35D32d200L-5T-C	Coolant	35	32	5	200			
TEBL-35D32d250L-5T-C	Coolant	35	32	5	250			

TD4N 双面快进给铣刀杆
TD4N Double-sided High Feed Milling Cutter

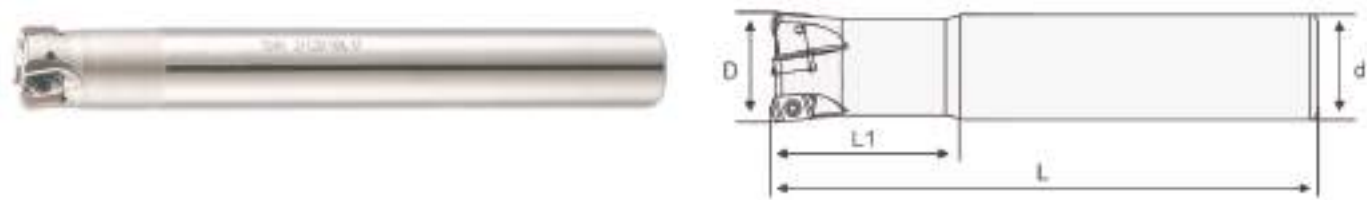

技术参数/Technical Parameters




类型 Type	TD4N 双面快进给铣刀杆 TD4N Double-sided High Feed Milling Cutter	直径大小 Diameter size	16~35mm
螺丝 Screw	M3*8.5	适用刀粒 Inserts	ENMU0603ER
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~5T


规格 Specification		尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
		D	d	a	L1	L			
TD4N-16-C16-160-2T		16	16	10	40	160	ENMU0603ER	M3*8.5	T8
TD4N-16-C16-200-2T		16	16	10	40	200			
TD4N-17-C16-160-2T		17	16	10	50	160			
TD4N-17-C16-200-2T		17	16	10	50	200			
TD4N-20-C20-160-3T		20	20	10	50	160			
TD4N-20-C20-200-3T		20	20	10	50	200			
TD4N-21-C20-160-3T		21	20	10	50	160			
TD4N-21-C20-200-3T		21	20	10	50	200			
TD4N-25-C25-160-4T		25	25	10	50	160			
TD4N-25-C25-200-4T		25	25	10	50	200			
TD4N-26-C25-160-4T		26	25	10	50	160			
TD4N-26-C25-200-4T		26	25	10	50	200			
TD4N-32-C32-160-5T		32	32	10	50	160			
TD4N-32-C32-200-5T		32	32	10	50	200			
TD4N-33-C32-160-5T		33	32	10	50	160			
TD4N-33-C32-200-5T		33	32	10	50	200			
TD4N-35-C32-160-5T		35	32	10	50	160			
TD4N-35-C32-200-5T		35	32	10	50	200			

LN11 方肩铣刀杆

LN11 Shoulder Milling Holder

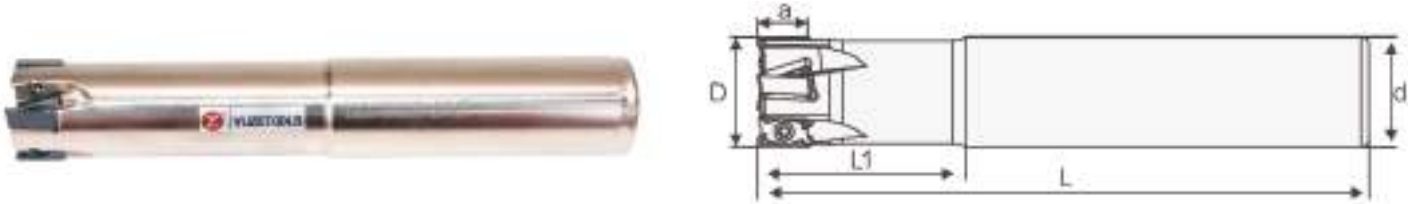

技术参数/Technical Parameters




类型 Type	LN11 方肩铣刀杆 LN11 Shoulder Milling Holder	直径大小 Diameter size	16~35mm
螺丝 Screw	M3	适用刀粒 Inserts	LNMU110408、LNGU110408
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~5T


规格 Specification	尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
LN11R16x16x100-2T	16	16	50	100	LNMU110408 LNGU110408	M3	T10
LN11R17x16x160-2T	17	16	25	160			
LN11R20x20x130-3T	20	20	60	130			
LN11R21x20x130-3T	21	20	30	130			
LN11R25x25x150-4T	25	25	75	150			
LN11R26x25x150-4T	26	25	30	150			
LN11R32x32x150-5T	32	32	50	150			
LN11R32x32x200-5T	32	32	100	200			
LN11R35x32x150-5T	35	32	30	150			
LN11R35x32x200-5T	35	32	30	200			

EXSAP 双面快进给铣刀杆

EXSAP Double-sided High Feed Milling Cutter

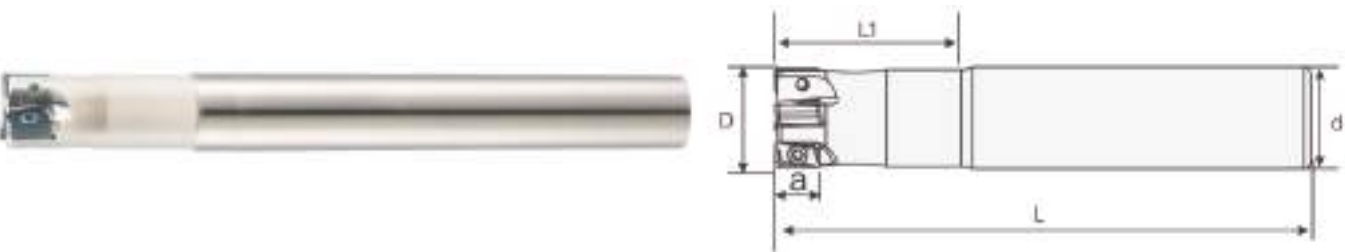

技术参数/Technical Parameters




类型 Type	EXSAP 双面快进给铣刀杆 EXSAP Double-sided High Feed Milling Cutter	直径大小 Diameter size	16~35mm
螺丝 Screw	M3*8.5	适用刀粒 Inserts	ZNGU110508ZER
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~5T


规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
EXSAP-16-C16-160-2T	16	16	10	40	160	ZNGU110508ZER	M3*8.5	T8
EXSAP-16-C16-200-2T	16	16	10	40	200			
EXSAP-17-C16-160-2T	17	16	10	50	160			
EXSAP-17-C16-200-2T	17	16	10	50	200			
EXSAP-20-C20-160-3T	20	20	10	50	160			
EXSAP-20-C20-200-3T	20	20	10	50	200			
EXSAP-21-C20-160-3T	21	20	10	50	160			
EXSAP-21-C20-200-3T	21	20	10	50	200			
EXSAP-25-C25-160-4T	25	25	10	50	160			
EXSAP-25-C25-200-4T	25	25	10	50	200			
EXSAP-26-C25-160-4T	26	25	10	50	160			
EXSAP-26-C25-200-4T	26	25	10	50	200			
EXSAP-32-C32-160-5T	32	32	10	50	160			
EXSAP-32-C32-200-5T	32	32	10	50	200			
EXSAP-33-C32-160-5T	33	32	10	50	160			
EXSAP-33-C32-200-5T	33	32	10	50	200			
EXSAP-35-C32-160-5T	35	32	10	50	160			
EXSAP-35-C32-200-5T	35	32	10	50	200			

MFSN88 高进给铣刀杆

MFSN88 Hi-feed Milling Holder

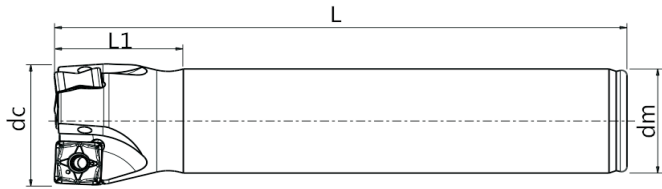

技术参数/Technical Parameters




类型 Type	MFSN88 高进给铣刀杆 MFSN88 Hi-feed Milling Holder	直径大小 Diameter size	32、40mm
螺丝 Screw	M4.5	适用刀粒 Inserts	SNMU1305
材质 Material	特殊合金钢 Special Alloy Steel	角度 Angle	88°


规格 Specification	尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
	dc	dm	L1	L			
MFSN88-D32-C32-40-160	32	32	35	160	SNMU1305	M4.5	T15
MFSN88-D40-C32-40-160	40	32	35	160			

4NKT 高进给铣刀杆

4NKT Hi-Feed Milling Cutter

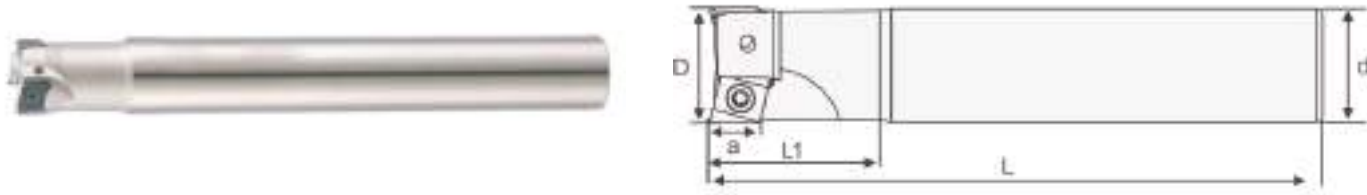

技术参数/Technical Parameters




类型 Type	4NKT 高进给铣刀杆 4NKT Hi-feed Milling Holder	直径大小 Diameter size	16~25mm
螺丝 Screw	M3	适用刀粒 Inserts	4NKT060308
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~4T


规格 Specification	尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	L	T			
D16-C15-160-2T	16	15	160	2	4NKT060308	M3	T10
D15-C16-100-2T	15	16	100	2			
D15.8-C16-160-2T	15.8	16	160	2			
D16-C16-160-2T	16	16	160	2			
D16-C16-200-2T	16	16	200	2			
D17-C16-160-2T	17	16	160	2			
D17-C16-200-2T	17	16	200	2			
D20-C19-160-3T	20	19	160	3			
D20-C19-200-3T	20	19	200	3			
D20-C20-130-3T	20	20	130	3			
D20-C20-160-3T	20	20	160	3			
D21-C20-160-3T	21	20	160	3			
D21-C20-200-3T	21	20	200	3			
D25-C24-160-4T	25	24	160	4			
D25-C24-200-4T	25	24	200	4			

4NKT 高进给铣刀杆

4NKT Hi-Feed Milling Cutter

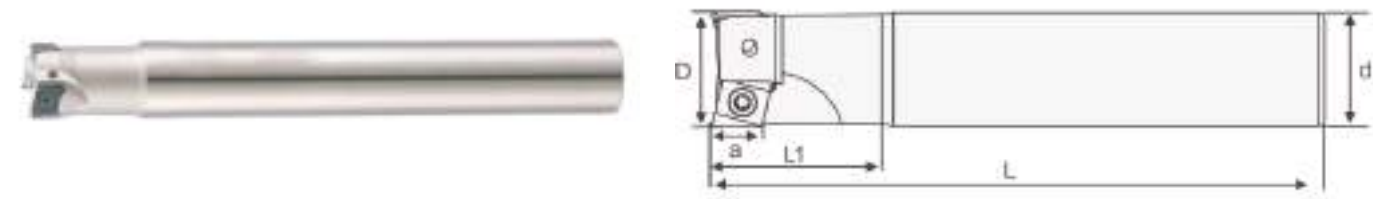

技术参数/Technical Parameters




类型 Type	4NKT 高进给铣刀杆 4NKT Hi-feed Milling Holder	直径大小 Diameter size	25~40mm
螺丝 Screw	M3	适用刀粒 Inserts	4NKT060308
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	4~6T


规格 Specification	尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	L	T			
D25-C25-130-4T	25	25	130	4	4NKT060308	M3	T10
D25-C25-160-4T	25	25	160	4			
D25-C25-200-4T	25	25	200	4			
D26-C25-160-4T	26	25	160	4			
D26-C25-200-4T	26	25	200	4			
D30-C25-160-4T	30	25	160	4			
D30-C25-200-4T	30	25	200	4			
D32-C32-160-5T	32	32	160	5			
D32-C32-200-5T	32	32	200	5			
D35-C32-160-5T	35	32	160	5			
D35-C32-200-5T	35	32	200	5			
D40-C32-160-6T	40	32	160	6			
D40-C32-200-6T	40	32	200	6			

QM 高进给铣刀杆

QM Hi-feed Milling Holder

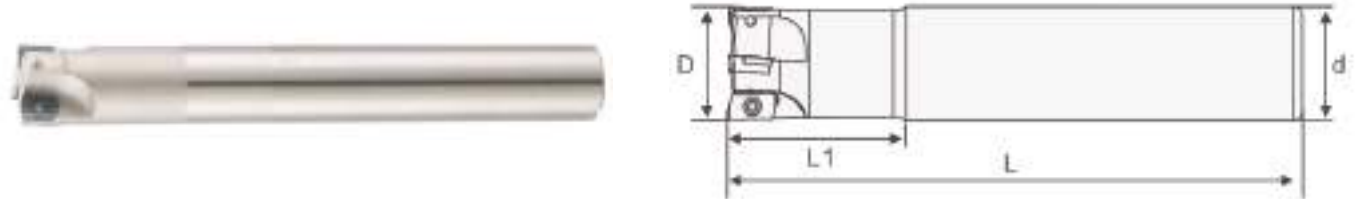

技术参数/Technical Parameters



类型 Type	QM 高进给铣刀杆 QM Hi-feed Milling Holder	加工范围 Working Scope	16~40mm
螺丝 Screw	M2.5	中心孔尺寸 Center Hole Size	16~32mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	YP..1003..ZER EP..1003..ZTR ZP..1003..ZER


规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
S2016S16-160	16	16	60	160	YP..1003..ZER EP..1003..ZTR ZP..1003..ZER	M2.5	T8
S2017S16-160	17	16	35	160			
S3020S20-160	20	20	60	160			
S3021S20-160	21	20	35	160			
S4025S25-160	25	25	60	160			
S4026S25-160	26	25	35	160			
S5030S25-160	30	25	30	160			
S5032S32-160	32	32	60	160			
S6035S32-160	35	32	50	160			
S6040S32-160	40	32	35	160			

AHM20 铣刀杆

AHM20 Milling Holder



技术参数/Technical Parameters




类型 Type	AHM20 铣刀杆 AHM20 Milling Holder	直径大小 Diameter size	16~40mm
螺丝 Screw	M2.5	柄径 Shank Diameter	16~32mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	LNMX060410R-MM4


规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	dc	dm	a	T	L			
D16-C16-LN06-150-2T	16	16	10	2	150	LNMX060410R-MM4	M2.5	T8
D17-C16-LN06-150-2T	17	16	10	2	150			
D20-C20-LN06-160-3T	20	20	10	3	160			
D21-C20-LN06-160-3T	21	20	10	3	160			
D25-C25-LN06-180-3T	25	25	10	3	180			
D26-C25-LN06-180-3T	26	25	10	3	180			
D30-C25-LN06-200-4T	30	25	10	4	200			
D32-C32-LN06-200-4T	32	32	10	4	200			
D35-C32-LN06-200-4T	35	32	10	4	200			
D40-C32-LN06-200-4T	40	32	10	4	200			

ASM07R 高进给铣刀杆

ASM07R Hi-feed Milling Holder

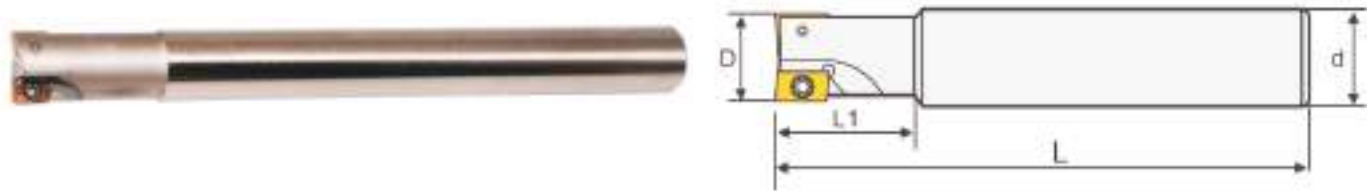

技术参数/Technical Parameters




类型 Type	ASM07R 高进给铣刀杆 ASM07R Hi-feed Milling Holder	直径大小 Diameter size	12~32mm
螺丝 Screw	M1.8	适用刀粒 Inserts	JDMT0702 EDMT0702
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	1~4T


规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
08D10d120L1T	8	10	16	100	JDMT0702 EDMT0702	M1.8	T6
09D10d120L1T	9	10	16	100			
010D10d120L2T	10	10	20	120			
011D10d120L2T	11	10	20	120			
012D12d120L2T	12	12	25	120			
012D12d120L3T	12	12	25	120			
013D12d120L2T	13	12	25	120			
013D12d120L3T	13	12	25	120			
014D12d120L3T	14	12	25	120			
015D16d150L3T	15	16	50	150			
016D16d150L4T	16	16	50	150			

R390 高光型铣刀杆

R390 Indexable Milling Cutter

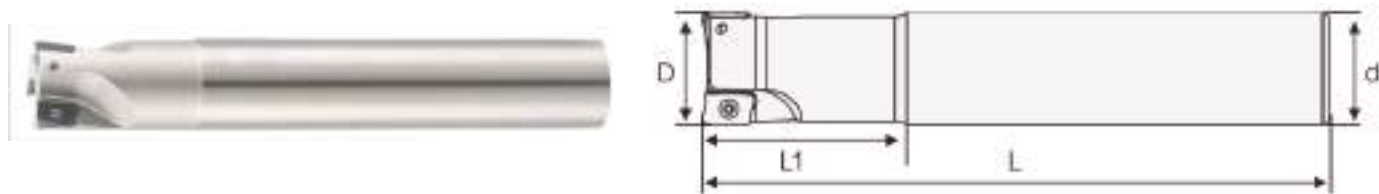

技术参数/Technical Parameters




类型 Type	R390 高光型铣刀杆 R390 Indexable Milling Cutter	直径大小 Diameter size	16~20mm
螺丝 Screw	M2.5*6	适用刀粒 Inserts	R390-11T308 R390-170408
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2T


规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
R390-16-C15-160-2T	16	15	10	25	160	R390-11T308	M2.5*6	T8
R390-16-C15.6-160-2T	16	15.6	10	25	160			
R390-16-C15.6-160-2T	16	15.6	10	25	200			
R390-16-C16-160-2T	16	16	10	25	160			
R390-16-C16-200-2T	16	16	10	25	200			
R390-17-C16-160-2T	17	16	10	25	160			
R390-17-C16-200-2T	17	16	10	25	200			
R390-21-C20-160-2T	21	20	10	25	160			
R390-21-C20-200-2T	21	20	10	25	200			
R390-20-C19-160-2T	20	19	10	25	160			
R390-20-C19-200-2T	20	19	10	25	200			
R390-20-C20-160-2T	20	20	10	25	160			
R390-20-C20-200-2T	20	20	10	25	200			

R390 高光型铣刀杆

R390 Indexable Milling Cutter

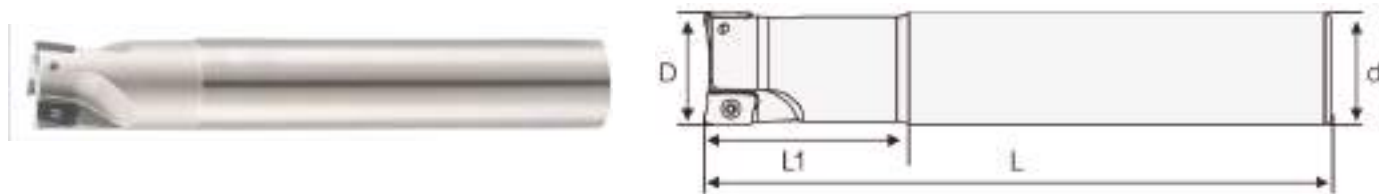

技术参数/Technical Parameters





类型 Type	R390 高光型铣刀杆 R390 Indexable Milling Cutter	直径大小 Diameter size	25~35mm
螺丝 Screw	M3.5*8	适用刀粒 Inserts	R390-11T308 R390-170408
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~3T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
R390-25-C25-160-2T	25	25	17	60	160	R390-170408	M3.5*8	T15
R390-25-C25-200-2T	25	25	17	60	200			
R390-25-C25-250-2T	25	25	17	60	250			
R390-25-C24-160-2T	25	24	17	50	160			
R390-25-C24-200-2T	25	24	17	50	200			
R390-25-C24-250-2T	25	24	17	50	250			
R390-26-C25-160-2T	26	25	17	50	160			
R390-26-C25-200-2T	26	25	17	50	200			
R390-26-C25-250-2T	26	25	17	50	250			
R390-32-C32-160-3T	32	32	17	48	160			
R390-32-C32-200-3T	32	32	17	48	200			
R390-32-C32-250-3T	32	32	17	48	250			
R390-35-C32-160-3T	35	32	17	60	160			
R390-35-C32-200-3T	35	32	17	60	200			
R390-35-C32-250-3T	35	32	17	60	250			
R390-35-C32-300-3T	35	32	17	60	300			
R390-35-C32-350-3T	35	32	17	60	350			

EMR 捨弃式铣刀杆

EMR Round Milling Cutter

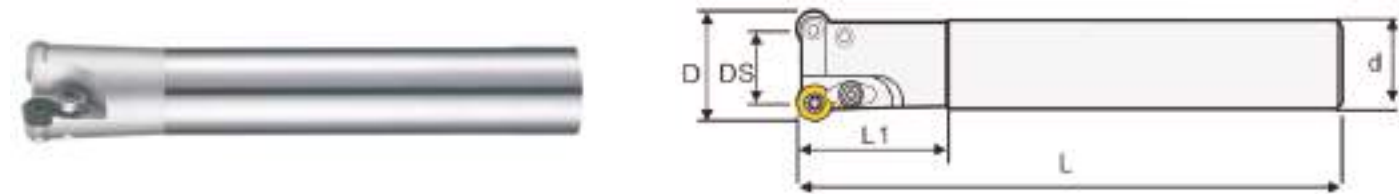



技术参数/Technical Parameters

类型 Type	EMR 捨弃式铣刀杆 EMR Round Milling Cutter	直径大小 Diameter size	10~35mm
螺丝 Screw	M2/M3/M3.5/M4	适用刀粒 Inserts	RDMW0517MOE RPMW0802MOE RPMW1003MOE
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~3T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	DS	d	L1	L			
EMR-2.5R10-C10-120-2T	10	5	10	20	120	RDMW0517MOE	M2*4.5	T6
EMR-2.5R12-C10-120-2T	12	5	10	20	120			
EMR-2.5R12-C12-120-2T	12	7	12	20	120			
EMR-4R12-C12-130-2T	12	4	12	30	130	RPMW0802MOE	M3*6 M3*7	T8
EMR-4R16-C16-160-2T	16	8	16	40	160			
EMR-4R16-C16-200-2T	16	8	16	40	200			
EMR-4R20-C20-160-2T	20	12	20	60	160			
EMR-4R20-C20-200-2T	20	12	20	70	200			
EMR-5R20-C20-160-2T	20	12	20	60	160	RPMW1003MOE	M4*9 M3.5*9	T15
EMR-5R20-C20-200-2T	20	12	20	70	200			
EMR-5R25-C20-160-2T	25	15	20	40	160			
EMR-5R25-C20-200-2T	25	15	20	40	200			
EMR-5R25-C25-160-2T	25	15	25	60	160			
EMR-5R25-C25-200-2T	25	15	25	70	200			
EMR-5R25-C25-250-2T	25	15	25	80	250			
EMR-5R30-C20-110-2T	30	20	20	30	110			
EMR-5R30-C25-160-2T	30	20	25	35	160			
EMR-5R30-C25-200-2T	30	20	25	35	200			
EMR-5R30-C25-250-2T	30	20	25	35	250			
EMR-5R35-C32-160-3T	35	25	32	48	160			
EMR-5R35-C32-200-3T	35	25	32	48	200			
EMR-5R35-C32-250-3T	35	25	32	48	250			
EMR-5R35-C32-300-3T	35	25	32	48	300			
EMR-5R35-C32-350-3T	35	25	32	48	350			

EMR 捨弃式铣刀杆

EMR Round Milling Cutter

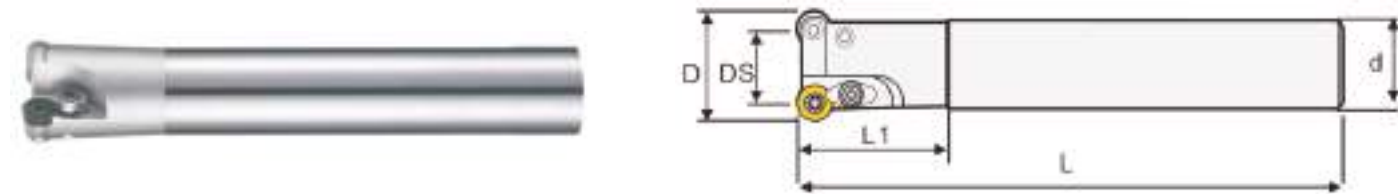



技术参数/Technical Parameters

类型 Type	EMR 捨弃式铣刀杆 EMR Round Milling Cutter	直径大小 Diameter size	25~40mm
螺丝 Screw	M3.5/M4	适用刀粒 Inserts	RPMW1003MOE RPMW1204MOE
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~4T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	DS	d	L1	L			
EMR-5R25-C24-160-2T	25	15	24	60	160	RPMW1003MOE	M4*8 M3.5*7	T15
EMR-5R25-C24-200-2T	25	15	24	70	200			
EMR-5R25-C24-250-2T	25	15	24	80	250			
EMR-5R26-C25-160-2T	26	16	25	60	160			
EMR-5R26-C25-200-2T	26	16	25	70	200			
EMR-5R26-C25-250-2T	26	16	25	80	250			
EMR-6R30-C25-160-2T	30	20	25	42	160	RPMW1204MOE	M4*9 M4*10	T15
EMR-6R30-C25-200-2T	30	20	25	42	200			
EMR-6R30-C25-250-2T	30	20	25	42	250			
EMR-6R32-C25-160-2T	32	20	25	42	160			
EMR-6R32-C25-200-2T	32	20	25	42	200			
EMR-6R32-C25-250-2T	32	20	25	42	250			
EMR-6R35-C32-160-3T	35	20	32	42	160			
EMR-6R35-C32-200-3T	35	20	32	42	200			
EMR-6R35-C32-250-3T	35	20	32	42	250			
EMR-6R35-C32-300-3T	35	20	32	42	300			
EMR-6R40-C32-160-3T	40	28	32	48	160			
EMR-6R40-C32-200-3T	40	28	32	48	200			
EMR-6R40-C32-250-3T	40	28	32	48	250			
EMR-6R40-C32-300-3T	40	28	32	48	300			
EMR-6R40-C32-160-4T	40	28	32	48	160			
EMR-6R40-C32-200-4T	40	28	32	48	200			
EMR-6R40-C32-250-4T	40	28	32	48	250			

EMRT 捨弃式铣刀杆

EMRT Round Milling Cutter

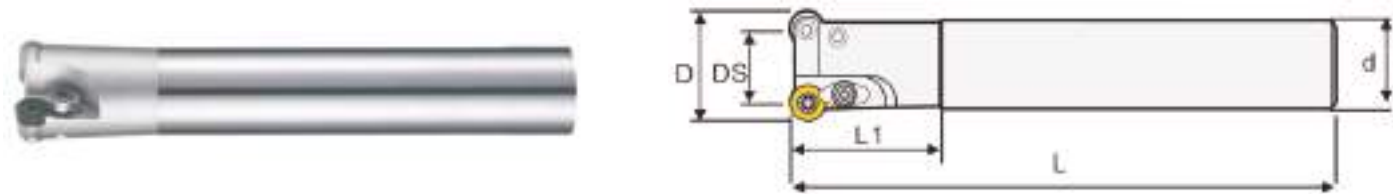



技术参数/Technical Parameters

类型 Type	EMRT 捨弃式铣刀杆 EMRT Round Milling Cutter	直径大小 Diameter size	12~20mm
螺丝 Screw	M3*6/M3*7	适用刀粒 Inserts	RPMT08T2MOE
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	DS	d	L1	L			
EMRT-4R12-C12-130-1T	12	4	12	30	130	RPMT08T2MOE	M3*6 M3*7	T8
EMRT-4R13-C12-130-2T	13	4	12	30	130			
EMRT-4R16-C15-160-2T	16	8	15	40	160			
EMRT-4R16-C16-200-2T	16	8	15	40	200			
EMRT-4R16-C16-160-2T	16	8	16	40	160			
EMRT-4R16-C16-200-2T	16	8	16	40	200			
EMRT-4R17-C16-160-2T	17	8	16	40	160			
EMRT-4R17-C16-200-2T	17	8	16	40	200			
EMRT-4R20-C20-160-2T	20	12	20	60	160			
EMRT-4R20-C20-200-2T	20	12	20	70	200			
EMRT-4R21-C20-160-2T	21	12	20	60	160			
EMRT-4R21-C20-200-2T	21	12	20	70	200			
EMRT-4R20-C19-160-2T	20	12	19	60	160			
EMRT-4R20-C19-200-2T	20	12	19	70	200			

EMRT 捨弃式铣刀杆

EMRT Round Milling Cutter

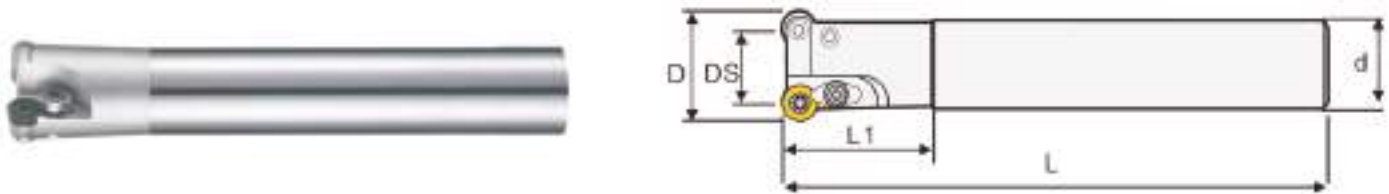


技术参数/Technical Parameters

类型 Type	EMRT 捨弃式铣刀杆 EMRT Round Milling Cutter	直径大小 Diameter size	20~35mm
螺丝 Screw	M3.5*9/M4*8	适用刀粒 Inserts	RPMT10T3MOE
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~3T


规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	DS	d	L1	L			
EMRT-5R20-C20-160-2T	20	12	20	60	160	RPMT10T3MOE	M4*8 M3.5*9	T15
EMRT-5R20-C20-200-2T	20	12	20	70	200			
EMRT-5R25-C20-160-2T	25	25	20	40	160			
EMRT-5R25-C20-200-2T	25	25	20	40	200			
EMRT-5R25-C24-160-2T	25	15	24	60	160			
EMRT-5R25-C24-200-2T	25	15	24	70	200			
EMRT-5R25-C24-250-2T	25	15	24	80	250			
EMRT-5R25-C25-160-2T	25	25	25	60	160			
EMRT-5R25-C25-200-2T	25	25	25	70	200			
EMRT-5R25-C25-250-2T	25	25	25	80	250			
EMRT-5R26-C25-160-2T	26	15	25	60	160			
EMRT-5R26-C25-200-2T	26	15	25	70	200			
EMRT-5R26-C25-250-2T	26	15	25	80	250			
EMRT-5R30-C20-110-2T	30	20	20	30	110			
EMRT-5R30-C25-160-2T	30	20	25	35	160			
EMRT-5R30-C25-200-2T	30	20	25	35	200			
EMRT-5R30-C25-250-2T	30	20	25	35	250			
EMRT-5R35-C32-160-3T	35	25	32	48	160			
EMRT-5R35-C32-200-3T	35	25	32	48	200			
EMRT-5R35-C32-250-3T	35	25	32	48	250			
EMRT-5R35-C32-300-3T	35	25	32	48	300			
EMRT-5R35-C32-350-3T	35	25	32	48	350			

TRS 捨弃式铣刀杆

TRS Round Milling Cutter

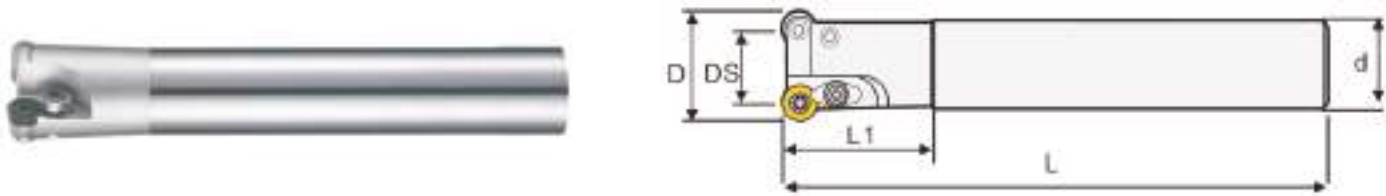

技术参数/Technical Parameters




类型 Type	TRS 捨弃式铣刀杆 TRS Round Milling Cutter	直径大小 Diameter size	25~26mm
螺丝 Screw	M3.5*7/M4*8	适用刀粒 Inserts	RDMT10T3MO-TN RDMT1204MO-TN
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2T


规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	DS	d	L1	L			
TRS-5R25-C24-160-2T	25	15	24	60	160	RDMT10T3MOTN	M4*8 M3.5*7	T15
TRS-5R25-C24-200-2T	25	15	24	70	200			
TRS-5R25-C24-250-2T	25	15	24	80	250			
TRS-5R26-C25-160-2T	26	16	25	60	160			
TRS-5R26-C25-200-2T	26	16	25	70	200			
TRS-5R26-C25-250-2T	26	16	25	80	250			

TRS 捨弃式铣刀杆

TRS Round Milling Cutter

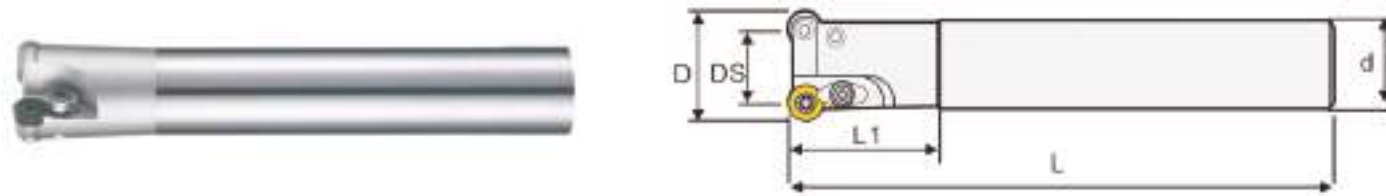

技术参数/Technical Parameters





类型 Type	TRS 捨弃式铣刀杆 TRS Round Milling Cutter	直径大小 Diameter size	30~40mm
螺丝 Screw	M4*9/M4*10	适用刀粒 Inserts	RDMT10T3MO-TN RDMT1204MO-TN
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~4T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	DS	d	L1	L			
TRS-6R30-C25-160-2T	30	20	25	42	160	RDMT1204MOTN	M4*9 M4*10	T15
TRS-6R30-C25-200-2T	30	20	25	42	200			
TRS-6R30-C25-250-2T	30	20	25	42	250			
TRS-6R32-C25-160-2T	32	20	25	42	160			
TRS-6R32-C25-200-2T	32	20	25	42	200			
TRS-6R32-C25-250-2T	32	20	25	42	250			
TRS-6R35-C32-160-3T	35	20	32	42	160			
TRS-6R35-C32-200-3T	35	20	32	42	200			
TRS-6R35-C32-250-3T	35	20	32	42	250			
TRS-6R35-C32-300-3T	35	20	32	42	300			
TRS-6R40-C32-160-3T	40	28	32	48	160			
TRS-6R40-C32-200-3T	40	28	32	48	200			
TRS-6R40-C32-250-3T	40	28	32	48	250			
TRS-6R40-C32-300-3T	40	28	32	48	300			
TRS-6R40-C32-160-4T	40	28	32	48	160			
TRS-6R40-C32-200-4T	40	28	32	48	200			
TRS-6R40-C32-250-4T	40	28	32	48	250			

TRS 捨弃式铣刀杆

TRS Round Milling Cutter

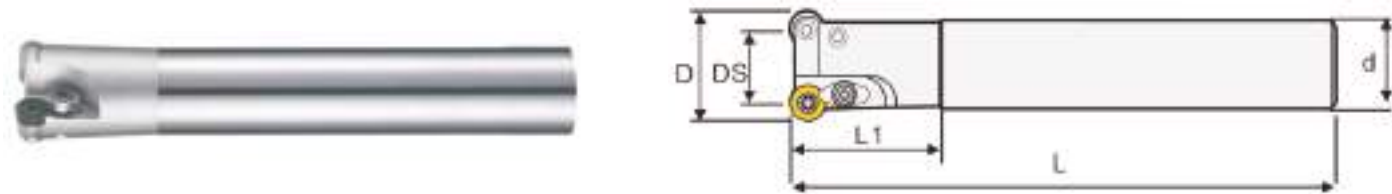



技术参数/Technical Parameters

类型 Type	TRS 捨弃式铣刀杆 TRS Round Milling Cutter	直径大小 Diameter size	12~35mm
螺丝 Screw	M3/M3.5/M4	适用刀粒 Inserts	RDMT0802MO-TN RDMT10T3MO-TN
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~3T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	DS	d	L1	L			
TRS-4R12-C12-130-2T	12	4	12	30	130	RDMT0802MOTN	M3*6 M3*7	T8
TRS-4R16-C16-160-2T	16	8	16	40	160			
TRS-4R16-C16-200-2T	16	8	16	40	200			
TRS-4R20-C20-160-2T	20	12	20	60	160			
TRS-4R20-C20-200-2T	20	12	20	70	200			
TRS-5R20-C20-160-2T	20	12	20	60	160	RDMT10T3MOTN	M4*8 M3.5*9	T15
TRS-5R20-C20-200-2T	20	12	20	70	200			
TRS-5R25-C20-160-2T	25	15	20	40	160			
TRS-5R25-C20-200-2T	25	15	20	40	200			
TRS-5R25-C25-160-2T	25	15	25	60	160			
TRS-5R25-C25-200-2T	25	15	25	70	200			
TRS-5R25-C25-250-2T	25	15	25	80	250			
TRS-5R30-C20-110-2T	30	20	20	30	110			
TRS-5R30-C25-160-2T	30	20	25	35	160			
TRS-5R30-C25-200-2T	30	20	25	35	200			
TRS-5R30-C25-250-2T	30	20	25	35	250			
TRS-5R35-C32-160-3T	35	25	32	48	160			
TRS-5R35-C32-200-3T	35	25	32	48	200			
TRS-5R35-C32-250-3T	35	25	32	48	250			
TRS-5R35-C32-300-3T	35	25	32	48	300			
TRS-5R35-C32-350-3T	35	25	32	48	350			

JRC 捨弃式铣刀杆

JRC Round Milling Cutter

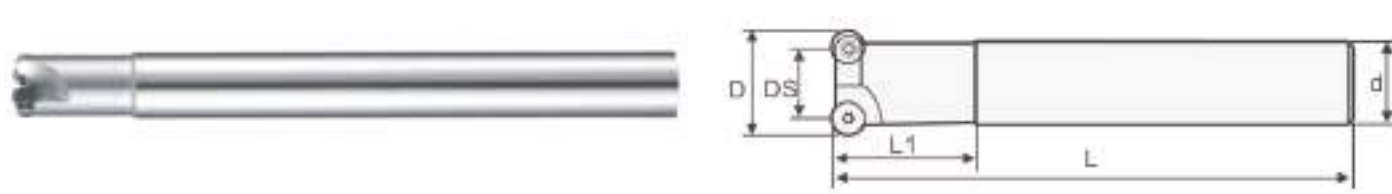


技术参数/Technical Parameters

类型 Type	JRC 捨弃式铣刀杆 JRC Round Milling Cutter	直径大小 Diameter size	25~50mm
螺丝 Screw	M3.5	适用刀粒 Inserts	RC*T10T3 RC*T1204
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~4T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	DS	d	L1	L			
JRC-5R25-C20-160-2T	25	15	20	40	160	RC*T10T3	M3.5*7	T15
JRC-5R25-C20-200-2T	25	15	20	40	200			
JRC-5R25-C25-160-2T	25	15	25	60	160			
JRC-5R25-C25-200-2T	25	15	25	70	200			
JRC-5R25-C25-250-2T	25	15	25	60	250			
JRC-6R32-C25-160-2T	32	20	25	50	160	RC*T1204	M3.5*7	T15
JRC-6R32-C25-200-2T	32	20	25	50	200			
JRC-6R32-C25-250-2T	32	20	25	50	250			
JRC-6R40-C32-160-3T	40	28	32	60	160			
JRC-6R40-C32-200-3T	40	28	32	60	200			
JRC-6R40-C32-250-3T	40	28	32	60	250			
JRC-6R40-C32-300-3T	50	38	32	60	300			
JRC-6R50-C32-200-4T	50	38	32	60	200			
JRC-6R50-C32-250-4T	50	38	32	60	250			

T2139 球头精加工立铣刀
T2139 Ball-nose Fine Milling Cutter

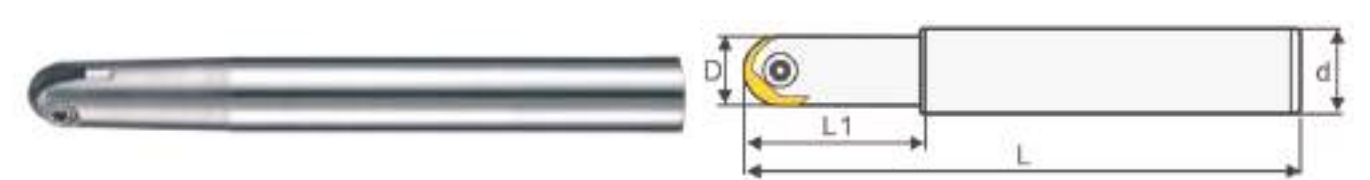


技术参数/Technical Parameters

类型 Type	T2139 球头精加工立铣刀 T2139 Ball-nose Fine Milling Cutter	直径大小 Diameter size	8~25mm
螺丝 Screw	T2139-D08/D10/D12/D16/D20/D25	适用刀粒 Inserts	P3202
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	单边 Single

规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
T2139-4R-C10-100	8	10	28	100	P3202-C08	T2139-D08	T8
T2139-4R-C10-130	8	10	28	130			
T2139-4R-C12-130	8	12	50	130			
T2139-4R-C12-160	8	12	65	160			
T2139-5R-C12-130	10	12	32	130	P3202-D10	T2139-D10	T15
T2139-5R-C12-160	10	12	32	160			
T2139-6R-C12-120	12	12	32	120	P3202-D12	T2139-D12	T20
T2139-6R-C12-130	12	12	32	130			
T2139-6R-C12-160	12	12	32	160			
T2139-6R-C16-160	12	16	32	160			
T2139-6R-C16-200	12	16	32	200	P3202-D16	T2139-D16	T20
T2139-8R-C16-130	16	16	65	130			
T2139-8R-C16-160	16	16	65	160			
T2139-8R-C16-200	16	16	65	200			
T2139-8R-C16-250	16	16	65	250			
T2139-8R-C20-200	16	20	65	200			
T2139-8R-C20-250	16	20	65	250			
T2139-10R-C20-160	20	20	35	160			
T2139-10R-C20-200	20	20	90	200	P3202-D20	T2139-D20	T20
T2139-10R-C20-250	20	20	90	250			
T2139-10R-C25-160	20	25	100	160			
T2139-10R-C25-200	20	25	100	200			
T2139-10R-C25-250	20	25	100	250	P3202-D25	T2139-D25	T20
T2139-12.5R-C25-160	25	25	45	160			
T2139-12.5R-C25-200	25	25	100	200			
T2139-12.5R-C25-250	25	25	100	250			

BAP300 铣刀杆
BAP300 Milling Cutter Holder

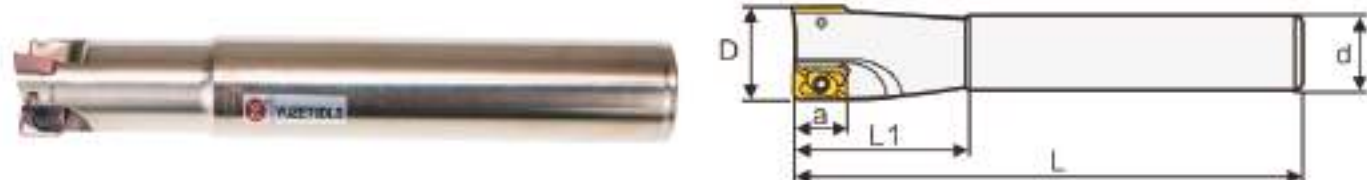


技术参数/Technical Parameters

类型 Type	BAP300 铣刀杆 BAP300 Milling Cutter Holder	直径大小 Diameter size	10~20mm
螺丝 Screw	M2.5	适用刀粒 Inserts	APMT1135PDER
材质 Material	特殊合金钢 Special Alloy Steel	角度 Angle	90°


规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
1025-C10-100-1T	10	10	25	100	APMT1135PDER	M2.5	T8
1030-C10-120-1T	10	10	30	120			
1120-C10-120-1T	11	10	20	120			
1230-C12-130-1T	12	12	30	130			
1320-C12-130-1T	13	12	20	130			
1435-C14-130-2T	14	14	35	130			
1445-C14-160-2T	14	14	45	160			
1625-C15-160-2T	16	15	25	160			
1625-C15-210-2T	16	15	25	210			
1635-C16-120-2T	16	16	35	120			
1645-C16-160-2T	16	16	45	160			
1660-C16-210-2T	16	16	60	210			
1725-C16-120-2T	17	16	25	120			
1725-C16-160-2T	17	16	25	160			
1725-C16-210-2T	17	16	25	210			
1825-C16-160-2T	18	16	25	160			
1825-C16-210-2T	18	16	25	210			
2025-C19-160-2T	20	19	25	160			
2025-C19-210-2T	20	19	25	210			

BAP300 铣刀杆

BAP300 Milling Cutter Holder

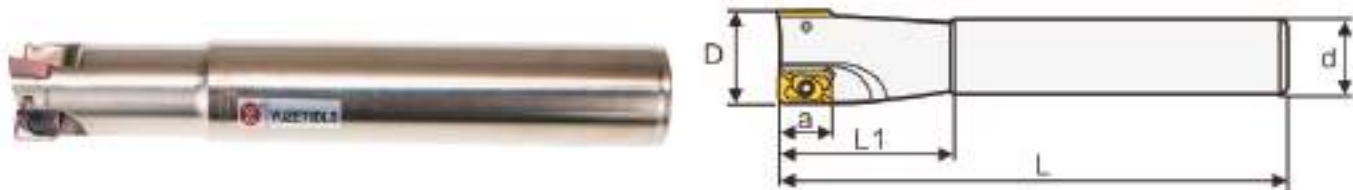

技术参数/Technical Parameters




类型 Type	BAP300 铣刀杆 BAP300 Milling Cutter Holder	直径大小 Diameter size	20~30mm
螺丝 Screw	M2.5	适用刀粒 Inserts	APMT1135PDER
材质 Material	特殊合金钢 Special Alloy Steel	角度 Angle	90°


规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
2035-C20-120-2T	20	20	35	120	APMT1135PDER	M2.5	T8
2035-C20-120-3T	20	20	35	120			
2045-C20-160-2T	20	20	45	160			
2045-C20-160-3T	20	20	45	160			
2060-C20-210-2T	20	20	60	210			
2060-C20-210-3T	20	20	60	210			
2125-C20-120-2T	21	20	25	120			
2125-C20-120-3T	21	20	25	120			
2125-C20-160-2T	21	20	25	160			
2125-C20-160-3T	21	20	25	160			
2125-C20-210-2T	21	20	25	210			
2125-C20-210-3T	21	20	25	210			
2530-C24-160-4T	25	24	30	160			
2530-C24-210-4T	25	24	30	210			
2545-C25-160-4T	25	25	45	160			
2560-C25-210-4T	25	25	60	210			
2630-C25-160-4T	26	25	30	160			
2630-C25-210-4T	26	25	30	210			
3030-C25-160-4T	30	25	30	160			

BAP400 铣刀杆

BAP400 Milling Cutter Holder

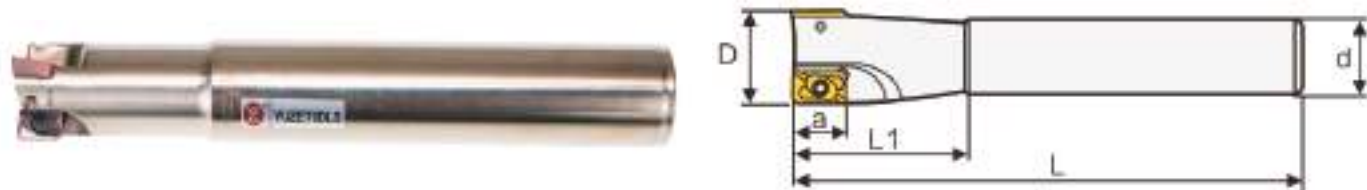


技术参数/Technical Parameters



类型 Type	BAP400 铣刀杆 BAP400 Milling Cutter Holder	直径大小 Diameter size	25~32mm
螺丝 Screw	M4	适用刀粒 Inserts	APMT1604PDER
材质 Material	特殊合金钢 Special Alloy Steel	角度 Angle	90°

规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
2530-C24-160-2T	25	24	30	160	APMT1604PDER	M4	T15
2530-C24-210-2T	25	24	30	210			
2545-C25-160-2T	25	25	45	160			
2560-C25-210-2T	25	25	60	210			
2580-C25-250-2T	25	25	80	250			
2630-C25-160-2T	26	25	30	160			
2630-C25-210-2T	26	25	30	210			
2630-C25-250-2T	26	25	30	250			
3035-C25-160-2T	30	25	35	160			
3035-C25-210-2T	30	25	35	210			
3035-C25-250-2T	30	25	35	250			
3245-C32-160-2T	32	32	45	160			
3245-C32-160-3T	32	32	45	160			
3260-C32-210-2T	32	32	60	210			
3260-C32-210-3T	32	32	60	210			
3280-C32-250-2T	32	32	80	250			
3280-C32-250-3T	32	32	80	250			

BAP400 铣刀杆
BAP400 Milling Cutter Holder

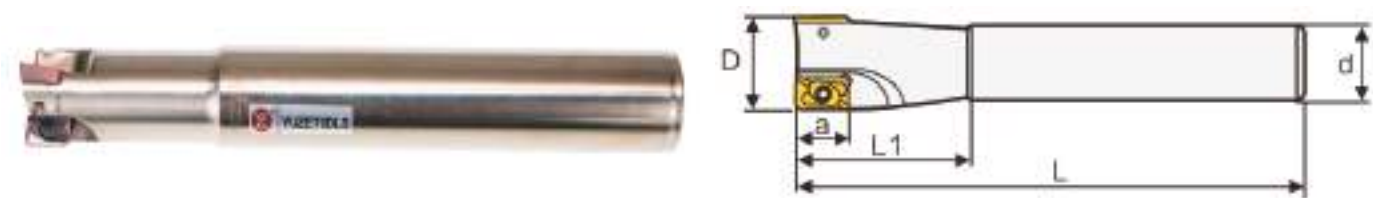


技术参数/Technical Parameters

类型 Type	BAP400 铣刀杆 BAP400 Milling Cutter Holder	直径大小 Diameter size	32~40mm
螺丝 Screw	M4	适用刀粒 Inserts	APMT1604PDER
材质 Material	特殊合金钢 Special Alloy Steel	角度 Angle	90°

规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
32100-C32-300-2T	32	32	100	300	APMT1604PDER	M4	T15
32100-C32-300-3T	32	32	100	300			
32100-C32-350-2T	32	32	100	350			
3335-C32-160-2T	33	32	35	160			
3335-C32-160-3T	33	32	35	160			
3335-C32-210-2T	33	32	35	210			
3335-C32-210-3T	33	32	35	210			
3540-C32-160-3T	35	32	40	160			
3540-C32-210-3T	35	32	40	210			
3540-C32-250-3T	35	32	40	250			
3540-C32-300-3T	35	32	40	300			
3540-C32-350-3T	35	32	40	350			
4040-C32-160-3T	40	32	40	160			
4040-C32-210-3T	40	32	40	210			
4040-C32-250-3T	40	32	40	250			
4040-C32-300-3T	40	32	40	300			
4040-C32-350-3T	40	32	40	350			

ASPV 插铣型铣刀
ASPV High Feed Milling Cutter

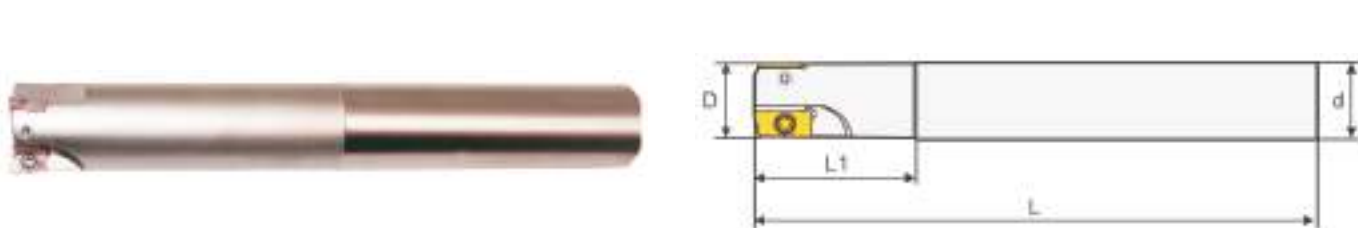

技术参数/Technical Parameters

类型 Type	ASPV 插铣型铣刀 ASPV High Feed Milling Cutter	直径大小 Diameter size	16~33mm
螺丝 Screw	M2.5*6	适用刀粒 Inserts	MPHW0603TN
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~4T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
ASPV-16-C15-160-2T	16	19	3	40	160	MPHW0603TN	M2.5*6	T8
ASPV-16-C15-200-2T	16	19	3	50	200			
ASPV-16-C16-160-2T	16	19	3	40	160			
ASPV-16-C16-200-2T	16	19	3	50	200			
ASPV-17-C16-160-2T	17	19	3	27	160			
ASPV-17-C16-200-2T	17	19	3	27	200			
ASPV-20-C19-160-2T	20	20	3	78	160			
ASPV-20-C19-200-2T	20	20	3	50	200			
ASPV-20-C19-250-2T	20	20	3	50	250			
ASPV-20-C20-160-2T	20	20	3	78	160			
ASPV-20-C20-200-2T	20	20	3	50	200			
ASPV-20-C20-250-2T	20	20	3	50	250			
ASPV-21-C20-160-2T	21	20	3	27	160			
ASPV-21-C20-200-2T	21	20	3	27	200			
ASPV-21-C20-250-2T	21	20	3	27	250			
ASPV-25-C25-160-3T	25	25	3	60	160			
ASPV-25-C25-200-3T	25	25	3	70	200			
ASPV-25-C25-250-3T	25	25	3	70	250			
ASPV-25-C25-300-3T	25	25	3	70	300			
ASPV-26-C25-200-3T	26	25	3	50	200			
ASPV-26-C25-250-3T	26	25	3	50	250			
ASPV-26-C25-300-3T	26	25	3	50	300			
ASPV-32-C32-160-4T	32	32	3	70	160			
ASPV-32-C32-200-4T	32	32	3	70	200			
ASPV-33-C32-160-4T	33	32	3	60	160			
ASPV-33-C32-200-4T	33	32	3	32	200			

AJX 快进给铣刀杆

AJX Hi-feed Milling Cutter Holder



技术参数/Technical Parameters

类型 Type	AJX 快进给铣刀杆 AJX Hi-feed Milling Cutter Holder	直径大小 Diameter size	16~28mm
螺丝 Screw	M2.5/M3/M3.5	适用刀粒 Inserts	JOMT06T215ZZSR JDMW09T320ZDSR JOMT080320ZZSR
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
AJX-16-C16-70-2T	16	16	1.5	30	70	JOMT06T215ZZSR	M2.5*6.3	T8
AJX-17-C16-70-2T	17	16	1.5	25	70			
AJX-16-C16-160-2T	16	16	1.5	70	160			
AJX-17-C16-160-2T	17	16	1.5	25	160			
AJX-16-C16-200-2T	16	16	1.5	80	200			
AJX-17-C16-200-2T	17	16	1.5	25	200			
AJX-20-C20-130-2T	20	20	1.5	50	130	JOMT080320ZZSR	M3*7	T8
AJX-22-C20-130-2T	22	20	1.5	30	130			
AJX-20-C20-160-2T	20	20	1.5	80	160			
AJX-22-C20-160-2T	22	20	1.5	30	160			
AJX-20-C20-200-2T	20	20	1.5	100	200			
AJX-22-C20-200-2T	22	20	1.5	30	200			
AJX-25-C25-160-2T	25	25	2	80	160	JDMW09T320ZDSR	M3.5*9	T15
AJX-28-C25-160-2T	28	25	2	40	160			
AJX-25-C25-200-2T	25	25	2	120	200			
AJX-28-C25-200-2T	28	25	2	40	200			
AJX-25-C25-250-2T	25	25	2	130	250			
AJX-28-C25-250-2T	28	25	2	40	250			

AJX 快进给铣刀杆

AJX Hi-feed Milling Cutter Holder




技术参数/Technical Parameters

类型 Type	AJX 快进给铣刀杆 AJX Hi-feed Milling Cutter Holder	直径大小 Diameter size	30~63mm
螺丝 Screw	M4/M5	适用刀粒 Inserts	DMW120420ZDSR JDMW140520ZDSR
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~4T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
AJX-30-C32-160-2T	30	32	2	70	160	JDMW120420ZDSR	M4*10	T15
AJX-30-C32-200-2T	30	32	2	120	200			
AJX-30-C32-250-2T	30	32	2	130	250			
AJX-32-C32-160-2T	32	32	2	70	160			
AJX-32-C32-200-2T	32	32	2	120	200			
AJX-32-C32-250-2T	32	32	2	130	250			
AJX-35-C32-160-2T	35	32	2	70	160			
AJX-35-C32-200-2T	35	32	2	70	200			
AJX-35-C32-250-2T	35	32	2	70	250			
AJX-40-C32-200-3T	40	32	2	70	200			
AJX-40-C32-250-3T	40	32	2	70	250			
AJX-40-C32-300-3T	40	32	2	70	300			
AJX-40-C42-200-3T	40	42	2	120	200	JDMW120420ZDSR	M4*10	T15
AJX-40-C42-250-3T	40	42	2	130	250			
AJX-40-C42-300-3T	40	42	2	180	300	JDMW140520ZDSR	M5*11	T20
AJX-50-C42-200-3T	50	42	2	50	200			
AJX-63-C42-200-4T	63	42	2	50	200			
AJX-50-C42-250-3T	50	42	2	50	250			
AJX-63-C42-250-4T	63	42	2	50	250			

ASR 快进给铣刀杆
ASR Hi-feed Milling Cutter Holder





技术参数/Technical Parameters

类型 Type	ASR 快进给铣刀杆 ASR Hi-feed Milling Cutter Holder	直径大小 Diameter size	16~40mm
螺丝 Screw	M2.6	适用刀粒 Inserts	EPNW0603TN-8 EPMT0603TN-8 EPMT0603EN-8LF
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~4T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
ASR-16-C16-120-2T	16	16	2	40	120	EPNW0603TN-8 EPMT0603TN-8 EPMT0603EN8LF	M2.5*6	T8
ASR-16-C16-160-2T	16	16	2	50	160			
ASR-16-C16-200-2T	16	16	2	70	200			
ASR-17-C16-120-2T	17	16	2	27	120			
ASR-17-C16-160-2T	17	16	2	27	160			
ASR-17-C16-200-2T	17	16	2	27	200			
ASR-20-C20-160-2T	20	20	2	50	160			
ASR-20-C20-200-2T	20	20	2	78	200			
ASR-20-C20-250-2T	20	20	2	90	250			
ASR-21-C20-160-2T	21	20	2	30	160			
ASR-21-C20-200-2T	21	20	2	30	200			
ASR-21-C20-250-2T	21	20	2	30	250			
ASR-25-C25-160-3T	25	25	2	48	160			
ASR-25-C25-200-3T	25	25	2	70	200			
ASR-25-C25-250-3T	25	25	2	100	250			
ASR-26-C25-200-3T	26	25	2	45	200			
ASR-26-C25-250-3T	26	25	2	45	250			
ASR-26-C25-300-3T	26	25	2	45	300			
ASR-32-C32-160-4T	32	32	2	78	160			
ASR-32-C32-200-4T	32	32	2	120	200			
ASR-33-C32-160-4T	33	32	2	48	160			
ASR-33-C32-200-4T	33	32	2	50	200			
ASR-35-C32-200-4T	35	32	2	45	200			
ASR-40-C32-160-4T	40	32	2	45	160			
ASR-40-C32-200-4T	40	32	2	45	200			

SKS 快进给铣刀杆
SKS Hi-feed Milling Cutter Holder

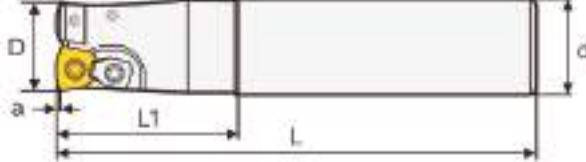


技术参数/Technical Parameters

类型 Type	SKS 快进给铣刀杆 SKS Hi-feed Milling Cutter Holder	直径大小 Diameter size	16~33mm
螺丝 Screw	M2.5/M3M4	适用刀粒 Inserts	WDMW04T215ZTR WDHW050316ZTR WDMW06T320ZTR WDHW06T320ZTR
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~3T


规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
AKS-16-C16-110-2T	16	16	0.8	30	110	WDMW04T215ZTR	M2.5*6.3	T8
AKS-16-C16-160-2T	16	16	0.8	70	160			
AKS-17-C16-110-2T	17	16	0.8	25	110			
AKS-17-C16-160-2T	17	16	0.8	25	160			
AKS-20-C20-130-2T	20	20	1.25	50	130	WDHW050316ZTR	M3*7	T8
AKS-21-C20-130-2T	21	20	1.25	50	130			
AKS-20-C20-160-2T	20	20	1.25	100	160			
AKS-21-C20-160-2T	21	20	1.25	50	160			
AKS-25-C25-160-2T	25	25	1.5	60	160	WDMW06T320ZTR WDHW06T320ZTR	M4*10	T15
AKS-26-C25-160-2T	26	25	1.5	60	160			
AKS-25-C25-200-2T	25	25	1.5	120	200			
AKS-26-C25-200-2T	26	25	1.5	60	200			
AKS-30-C32-160-2T	30	32	1.5	70	160			
AKS-30-C32-200-2T	30	32	1.5	120	200			
AKS-32-C32-160-3T	32	32	1.5	70	160			
AKS-32-C32-200-3T	32	32	1.5	120	200			
AKS-33-C32-160-3T	33	32	1.5	70	160			
AKS-33-C32-200-3T	33	32	1.5	70	200			

SKS 快进给铣刀杆

SKS Hi-feed Milling Cutter Holder

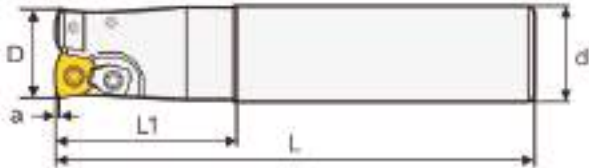

技术参数/Technical Parameters




类型 Type	SKS 快进给铣刀杆 SKS Hi-feed Milling Cutter Holder	直径大小 Diameter size	32~50mm
螺丝 Screw	M4.5*11	适用刀粒 Inserts	WDMT080520ZER
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~3T


规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
AKS-32-C32-160-2T	32	32	2	70	160	WDMT080520ZER	M4.5*11	T20
AKS-32-C32-200-2T	32	32	2	90	200			
AKS-33-C32-160-2T	33	32	2	50	160			
AKS-33-C32-200-2T	33	32	2	50	200			
AKS-40-C32-200-3T	40	32	2	50	200			
AKS-40-C32-250-3T	40	32	2	50	250			
AKS-50-C32-200-3T	50	32	2	50	200			
AKS-40-C42-200-3T	40	42	2	120	200			
AKS-40-C42-250-3T	40	42	2	130	250			
AKS-50-C42-200-3T	50	42	2	50	200			
AKS-50-C42-250-3T	50	42	2	50	250			

AHU 直角高速铣刀杆

AHU Right Angle Milling Cutter

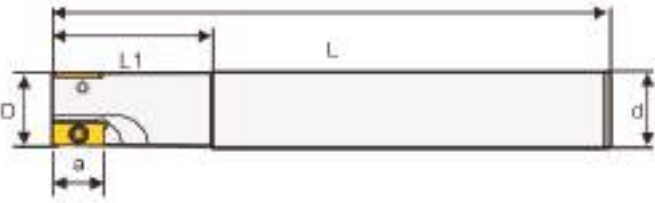

技术参数/Technical Parameters




类型 Type	AHU 直角高速铣刀杆 AHU Right Angle Milling Cutter	直径大小 Diameter size	10~21mm
螺丝 Screw	M2.5*6	适用刀粒 Inserts	JDMT1003
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	1~2T


规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
AHU-10-C10-130-1T	10	10	9	30	130	JDMT1003	M2.5*6	T8
AHU-11-C10-130-1T	11	10	9	25	130			
AHU-12-C12-120-1T	12	12	9	25	120			
AHU-12-C12-150-1T	12	12	9	25	150			
AHU-13-C12-130-1T	13	12	9	25	130			
AHU-16-C15-160-2T	16	15	9	35	160			
AHU-16-C15-200-2T	16	15	9	25	200			
AHU-16-C15.6-160-2T	16	15.6	9	35	160			
AHU-16-C15.6-200-2T	16	15.6	9	25	200			
AHU-16-C16-120-2T	16	16	9	35	120			
AHU-16-C16-160-2T	16	16	9	50	160			
AHU-16-C16-200-2T	16	16	9	60	200			
AHU-16-C16-250-2T	16	16	9	70	250			
AHU-17-C16-120-2T	17	16	9	25	120			
AHU-17-C16-160-2T	17	16	9	25	160			
AHU-17-C16-200-2T	17	16	9	25	200			
AHU-17-C16-250-2T	17	16	9	25	250			
AHU-20-C19-160-2T	20	19	9	30	160			
AHU-20-C19-200-2T	20	19	9	30	200			
AHU-20-C20-120-2T	20	20	9	40	120			
AHU-20-C20-160-2T	20	20	9	40	160			
AHU-20-C20-200-2T	20	20	9	60	200			
AHU-20-C20-250-2T	20	20	9	80	250			
AHU-21-C20-160-2T	21	20	9	30	160			
AHU-21-C20-200-2T	21	20	9	30	200			
AHU-21-C20-250-2T	21	20	9	30	250			

AHU 直角高速铣刀杆

AHU Right Angle Milling Cutter

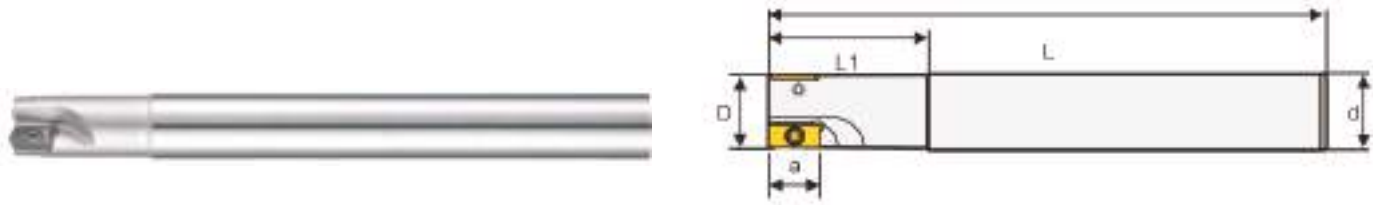

技术参数/Technical Parameters




类型 Type	AHU 直角高速铣刀杆 AHU Right Angle Milling Cutter	直径大小 Diameter size	25~40mm
螺丝 Screw	M4*9	适用刀粒 Inserts	JDMT1505
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~3T


规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
AHU-25-C24-160-2T	25	24	14	45	160	JDMT1505	M4*9	T15
AHU-25-C24-200-2T	25	24	14	40	200			
AHU-25-C24-250-2T	25	24	14	50	250			
AHU-25-C25-160-2T(3T)	25	25	14	50	160			
AHU-25-C25-200-2T(3T)	25	25	14	70	200			
AHU-25-C25-250-2T(3T)	25	25	14	100	250			
AHU-25-C25-300-2T(3T)	25	25	14	150	300			
AHU-26-C25-160-2T(3T)	26	25	14	40	160			
AHU-26-C25-200-2T(3T)	26	25	14	40	200			
AHU-26-C25-250-2T(3T)	26	25	14	40	250			
AHU-26-C25-300-2T(3T)	26	25	14	40	300			
AHU-32-C32-160-2T(3T)	32	32	14	50	160			
AHU-32-C32-200-2T(3T)	32	32	14	70	200			
AHU-32-C32-250-2T(3T)	32	32	14	100	250			
AHU-32-C32-300-2T(3T)	32	32	14	100	300			
AHU-32-C32-350-3T	32	32	14	150	350			
AHU-35-C32-160-3T	35	32	40	45	160			
AHU-35-C32-200-3T	35	32	40	45	200			
AHU-35-C32-250-3T	35	32	40	45	250			
AHU-35-C32-300-3T	35	32	40	45	300			
AHU-35-C32-350-3T	35	32	40	45	350			
AHU-35-C32-400-3T	35	32	40	45	400			
AHU-35-C32-450-3T	35	32	40	45	450			
AHU-35-C32-500-3T	35	32	40	45	500			
AHU-40-C32-200-3T	40	32	40	45	200			
AHU-40-C32-250-3T	40	32	40	45	250			
AHU-40-C32-300-3T	40	32	40	45	300			

TEX 快削直角粗铣刀

TEX Right Angle Fine Milling Cutter

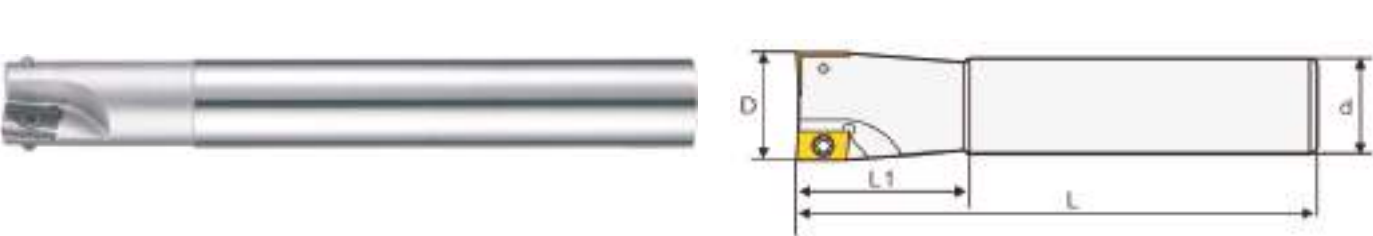

技术参数/Technical Parameters




类型 Type	TEX 快削直角粗铣刀 TEX Right Angle Fine Milling Cutter	直径大小 Diameter size	14~21mm
螺丝 Screw	M3.5*6	适用刀粒 Inserts	APET120204 ADET160308
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~3T


规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
TEX-14-C16-130-2T	14	16	30	130	APET120204	M3.5*6	T15
TEX-18-C20-130-2T	18	20	30	130			
TEX-20-C20-130-2T	20	20	30	130			
TEX-20-C20-160-2T	20	20	35	160			
TEX-20-C20-200-2T	20	20	40	200			
TEX-20-C20-250-2T	20	20	50	250			
TEX-21-C20-160-2T	21	20	35	160			
TEX-21-C20-200-2T	21	20	40	200			
TEX-21-C20-250-2T	21	20	50	250			

TEX 快削直角粗铣刀

TEX Right Angle Fine Milling Cutter

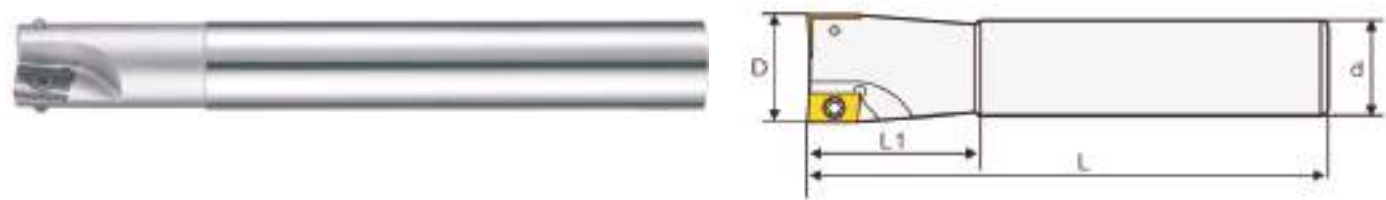

技术参数/Technical Parameters




类型 Type	TEX 快削直角粗铣刀 TEX Right Angle Fine Milling Cutter	直径大小 Diameter size	30~40mm
螺丝 Screw	M4*8	适用刀粒 Inserts	APET120204 ADET160308
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~3T


规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
TEX-30-C32-160-2T	30	32	40	160	ADET160308	M4*8	T15
TEX-32-C32-160-2T	32	32	40	160			
TEX-32-C32-200-2T	32	32	45	200			
TEX-32-C32-250-2T	32	32	50	250			
TEX-32-C32-300-2T	32	32	60	300			
TEX-32-C32-400-2T	32	32	70	400			
TEX-32-C42-400-2T	32	42	90	400			
TEX-35-C32-160-3T	35	32	40	160			
TEX-35-C32-200-3T	35	32	50	200			
TEX-35-C32-250-3T	35	32	50	250			
TEX-35-C32-300-3T	35	32	50	300			
TEX-35-C32-350-3T	35	32	50	350			
TEX-35-C32-400-3T	35	32	50	400			
TEX-35-C42-250-3T	35	42	50	250			
TEX-40-C42-160-3T	40	42	45	160			

PME 小径刀杆

PME Mini Milling Cutter

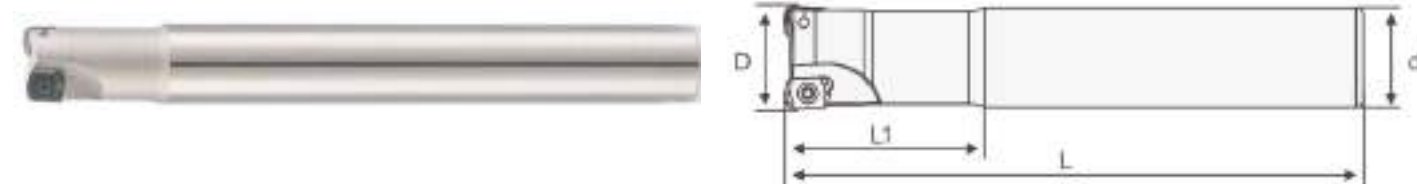

技术参数/Technical Parameters




类型 Type	PME 小径刀杆 PME Mini Milling Cutter	直径大小 Diameter size	10~13mm
螺丝 Screw	M1.8	适用刀粒 Inserts	EOMT0602 EOMW0602 ZOMT0602 YOHW0602
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2T


规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
PME-10-C10-120-2T	10	10	25	120	EOMT0602 EOMW0602 ZOMT0602 YOHW0602	M1.8	T6
PME-11-C10-120-2T	11	10	25	120			
PME-12-C12-120-2T	12	12	25	120			
PME-13-C12-120-2T	13	12	25	120			

T217.69 直角端铣刀杆

T217.69 Right Angle Milling Cutter

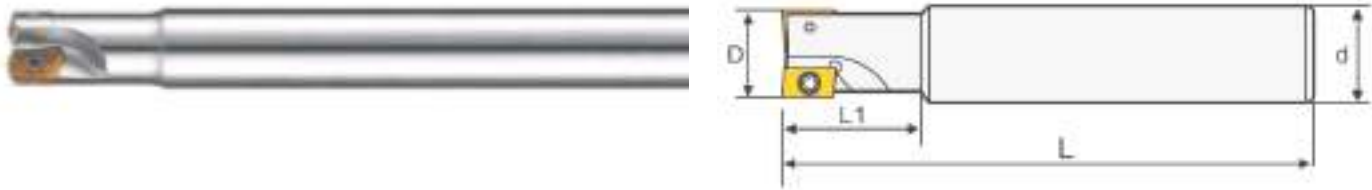

技术参数/Technical Parameters



类型 Type	T217.69 直角端铣刀杆 T217.69 Right Angle Milling Cutter	直径大小 Diameter size	10~13mm
螺丝 Screw	M1.8	适用刀粒 Inserts	XOMX0602
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2T


规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	L1	L			
T217.69-10-C10-120-2T	10	10	20	120	EOMT0602 EOMW0602 ZOMT0602 YOHW0602	M1.8	T6
T217.69-11-C10-120-2T	11	10	16	120			
T217.69-12-C12-120-2T	12	12	25	120			
T217.69-13-C12-120-2T	13	12	18	120			

VCGT 粗铣刀杆

VCGT Rough Milling Holder



技术参数/Technical Parameters



类型 Type	VCGT 粗铣刀杆 VCGT Rough Milling Holder	直径大小 Diameter size	32~40mm
螺丝 Screw	M5	适用刀粒 Inserts	VCGT220530F
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~3T

规格 Specification	尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
	dc	dm	L1	L			
VCGT-D32-C25-160-2T	32	25	50	160	VCGT220530F	M5	T20
VCGT-D32-C25-200-2T	32	25	50	200			
VCGT-D32-C25-250-2T	32	25	50	250			
VCGT-D32-C32-160-2T	32	32	60	160			
VCGT-D32-C32-200-2T	32	32	60	200			
VCGT-D35-C32-160-2T	35	32	50	160			
VCGT-D35-C32-200-2T	35	32	50	200			
VCGT-D35-C32-250-2T	35	32	50	250			
VCGT-D40-C32-160-3T	40	32	55	160			
VCGT-D40-C32-200-3T	40	32	55	200			
VCGT-D40-C32-250-3T	40	32	55	250			

BNM 精加工铣刀杆


BNM Milling Cutter



技术参数/Technical Parameters

精加工
Finishing


粗加工
Rough Machining

平面加工
Flat Machining

平面加工
Flat Machining

台阶面加工
Step Processing

切屑/槽
Cutting-off & Grooving


侧面加工
Side Machining

类型 Type	BNM 精加工铣刀杆 BNM Milling Cutter	直径大小 Diameter size	25~30mm
螺丝 Screw	BNM12.5R/BNM15R	适用刀粒 Inserts	BNM100/120/160/200/250/300
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	单边 Single

规格 Specification	尺寸 Measure			刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	L			
BNM-12.5R-C25-100L-1T	25	25	100	BNM250	BNM12.5R	T20
BNM-12.5R-C25-160L-1T	25	25	160			
BNM-12.5R-C25-200L-1T	20	25	200			
BNM-12.5R-C32-160L-1T	20	32	160			
BNM-12.5R-C32-180L-1T	20	32	180			
BNM-12.5R-C32-200L-1T	20	32	200			
BNM-15R-C32-180L-1T	30	32	180	BNM300	BNM15R	T30
BNM-15R-C32-200L-1T	30	32	200			
BNM-15R-C32-250L-1T	30	32	250			
BNM-15R-C32-300L-1T	25	32	300			


RCF 球形中粗铣刀

RCF Ball-nose Rough Milling Cutter

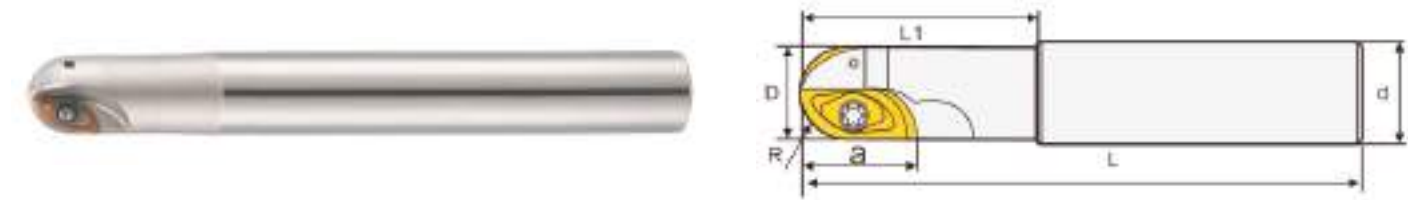

技术参数/Technical Parameters

精加工
Finishing


仿形加工
Profiling Processing

类型 Type	RCF 球形中粗铣刀 RCF Ball-nose Rough Milling Cutter	直径大小 Diameter size	16~30mm
螺丝 Screw	M3/M4/M5	适用刀粒 Inserts	ZCET080 ZCEW100 ZCEW125 ZCEW150
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2T

规格 Specification	尺寸 Measure						主刃刀粒 Master Insert	副刃刀粒 Slave Insert	扳手 Wrench
	R	D	d	a	L1	L			
RCF-8R-C16-160-2T	8	16	16	18	50	160	ZCET080CE	ZCET080SE	T8
RCF-10R-C20-160-2T	10	20	20	18	60	160	ZCEW100CE	ZCEW100SE	T8
RCF-10R-C20-200-2T	10	20	20	18	70	200			
RCF-10R-C25-160-2T	10	20	25	18	60	160			
RCF-10R-C25-200-2T	10	20	25	18	70	200			
RCF-10R-C25-250-2T	10	20	25	18	80	250			
RCF-10R-C32-250-2T	10	20	32	18	90	250			
RCF-10R-C32-300-2T	10	20	32	18	110	300	ZCEW125CE	ZCEW125SE	T15
RCF-12.5R-C25-160-2T	12.5	25	25	23	60	160			
RCF-12.5R-C25-200-2T	12.5	25	25	18	70	200			
RCF-12.5R-C32-250-2T	12.5	25	32	28	80	250			
RCF-12.5R-C32-300-2T	12.5	25	32	28	90	300	ZCEW150CE	ZCEW150SE	T20
RCF-12.5R-C32-350-2T	12.5	25	32	28	110	350			
RCF-15R-C32-160-2T	15	30	32	28	60	160			
RCF-15R-C32-200-2T	15	30	32	28	70	200			
RCF-15R-C32-250-2T	15	30	32	28	80	250			
RCF-15R-C32-300-2T	15	30	32	28	110	300	RCF-15R-C32-350-2T		
RCF-15R-C32-350-2T	15	30	32	28	110	350			

RCFL 球形中粗铣刀(长柄型)

RCFL Ball-nose Rough Milling Cutter

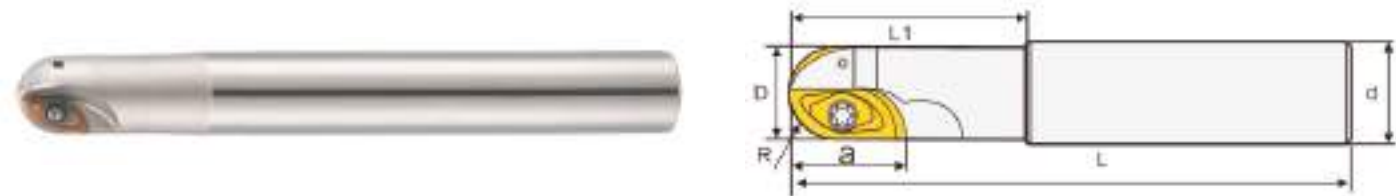


技术参数/Technical Parameters

类型 Type	RCFL 球形中粗铣刀(长柄型) RCFL Ball-nose Rough Milling Cutter	直径大小 Diameter size	20~30mm
螺丝 Screw	M3/M4/M5	适用刀粒 Inserts	ZCET080 ZCEW100 ZCEW125 ZCEW150
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	4T

规格 Specification	尺寸 Measure						主刃刀粒 Master Insert	副刃螺丝 Slave Screw	扳手 Wrench	
	R	D	d	a	L1	L				
RCFL-10R-C20-160-4T	10	20	20	18	60	160	ZCEW100CE	ZCEW100SE	CPMT080204	
RCFL-10R-C20-200-4T	10	20	20	18	70	200				
RCFL-10R-C25-160-4T	10	20	25	18	60	160				
RCFL-10R-C25-200-4T	10	20	25	18	70	200				
RCFL-10R-C25-250-4T	10	20	25	18	80	250				
RCFL-10R-C32-250-4T	10	20	32	18	115	250				
RCFL-10R-C32-300-4T	10	20	32	18	115	300				
RCFL-12.5R-C25-160-4T	12.5	25	25	23	60	160	ZCEW125CE	ZCEW125SE	CPMT090308	
RCFL-12.5R-C25-200-4T	12.5	25	25	18	70	200				
RCFL-12.5R-C32-160-4T	12.5	32	32	23	70	160				
RCFL-12.5R-C32-200-4T	12.5	32	32	23	80	200				
RCFL-12.5R-C32-250-4T	12.5	32	32	23	90	250				
RCFL-12.5R-C32-300-4T	12.5	32	32	23	105	300				
RCFL-15R-C32-160-4T	15	32	32	28	60	160	ZCEW150CE	ZCEW150SE		
RCFL-15R-C32-200-4T	15	32	32	28	70	200				
RCFL-15R-C32-250-4T	15	32	32	28	80	250				
RCFL-15R-C32-300-4T	15	32	32	28	100	300				
RCFL-15R-C32-350-4T	15	32	32	28	100	350				
RCFL-20R-C42-200-4T	20	30	42	28	70	200	ZCEW200CE	ZCEW200SE		CPMT090308
RCFL-20R-C42-250-4T	20	30	42	28	80	250				
RCFL-20R-C42-300-4T	20	30	42	28	100	300				

APX3000R 插铣型铣刀

APX3000R Finish Indexable Milling Cutter

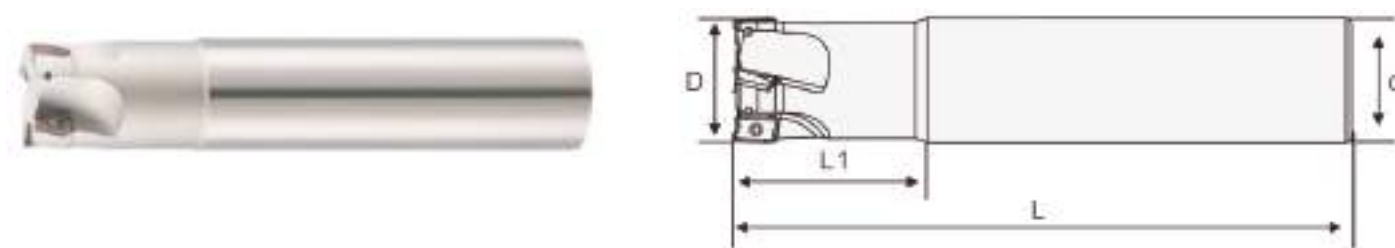


技术参数/Technical Parameters

类型 Type	APX3000R 插铣型铣刀 APX3000R Finish Indexable Milling Cutter	直径大小 Diameter size	10~32mm
螺丝 Screw	M2.5*6	适用刀粒 Inserts	AOMT123608
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	1~3T


规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
10-C10-100-1T	10	10	10	25	100	AOMT123608	M2.5*6	T8
12-C12-100-1T	12	12	10	25	100			
16-C16-160-2T	16	16	10	50	160			
17-C16-160-2T	17	16	10	50	160			
17-C16-200-2T	17	16	10	50	200			
18-C16-150-2T	18	16	10	50	150			
19-C16-150-2T	19	16	10	50	150			
20-C20-120-2T	20	20	10	50	120			
20-C20-160-2T	20	20	10	60	160			
20-C20-200-2T	20	20	10	70	200			
21-C20-150-2T	21	20	10	50	150			
21-C20-200-2T	21	20	10	50	200			
21-C20-250-2T	21	20	10	50	250			
22-C20-160-2T	22	20	10	50	160			
25-C25-160-3T	25	25	10	50	160			
26-C25-200-3T	26	25	10	50	200			
26-C25-250-3T	26	25	10	50	250			
26-C25-300-3T	26	25	10	50	300			
28-C25-160-3T	28	25	10	50	160			
30-C25-160-3T	30	25	10	50	160			
32-C32-160-3T	32	32	10	48	160			

SKG 快进给铣刀杆

SKG Indexable Milling Cutter

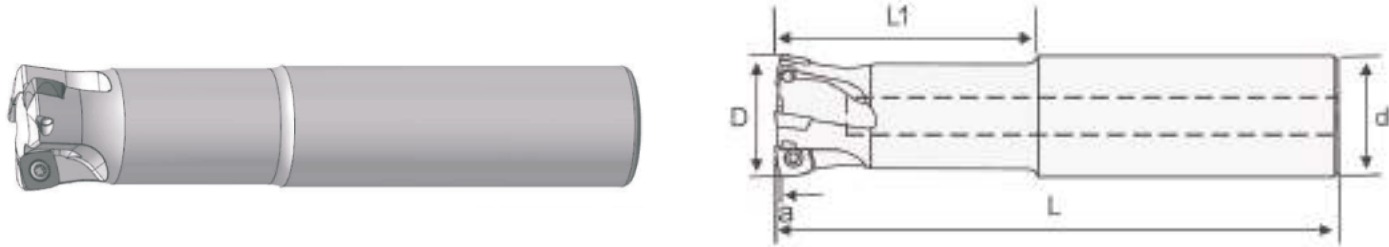

技术参数/Technical Parameters




类型 Type	SKG 快进给铣刀杆 SKG Indexable Milling Cutter	直径大小 Diameter size	25~40mm
螺丝 Screw	M3.5*10	适用刀粒 Inserts	SPNW100415ZTR
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~4T


规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
SKG-25-C25-160-2T	25	25	1.5	70	160	SPNW100415ZTR	M3.5*10	T15
SKG-25-C25-200-2T	25	25	1.5	70	200			
SKG-26-C25-160-2T	26	25	1.5	50	160			
SKG-26-C25-200-2T	26	25	1.5	50	200			
SKG-32-C32-160-3T	32	32	1.5	48	160			
SKG-32-C32-200-3T	32	32	1.5	48	200			
SKG-32-C32-250-3T	32	32	1.5	48	250			
SKG-35-C32-160-3T	35	32	1.5	60	160			
SKG-35-C32-200-3T	35	32	1.5	60	200			
SKG-35-C32-250-3T	35	32	1.5	60	250			
SKG-40-C32-160-4T	40	32	1.5	60	160			
SKG-40-C32-200-4T	40	32	1.5	60	200			
SKG-40-C32-250-4T	40	32	1.5	60	250			

MEW 高光型铣刀杆

MEW Double-sided Milling Cutter

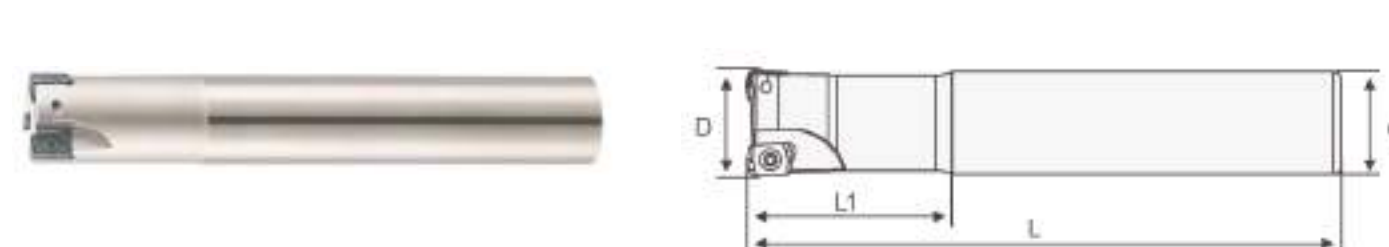


技术参数/Technical Parameters



类型 Type	MEW 高光型铣刀杆 MEW Double-sided Milling Cutter	直径大小 Diameter size	16~40mm
螺丝 Screw	M3*8	适用刀粒 Inserts	LOMU1004XER
材质 Material	特殊合金钢 Special Alloy Steel	刃数 Flutes	2~4T


规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	a	L1	L			
MEW-16-C16-160-2T	16	16	10	25	160	LOMU1004XER	M3*8	T8
MEW-17-C16-160-2T	17	16	10	25	160			
MEW-20-C20-160-2T	20	20	10	25	160			
MEW-20-C20-200-2T	20	20	10	25	200			
MEW-21-C20-160-2T	21	20	10	25	160			
MEW-21-C20-200-2T	21	20	10	25	200			
MEW-25-C25-160-3T	25	25	10	60	160			
MEW-25-C25-200-3T	25	25	10	60	200			
MEW-25-C25-250-3T	25	25	10	60	250			
MEW-26-C25-160-3T	26	25	10	50	160			
MEW-26-C25-200-4T	26	25	10	50	200			
MEW-30-C25-160-4T	30	25	10	50	160			
MEW-30-C25-200-4T	30	25	10	50	200			
MEW-32-C32-160-3T	32	32	15	48	160			
MEW-32-C32-200-3T	32	32	15	48	200			
MEW-35-C32-160-3T	35	32	15	40	160			
MEW-35-C32-200-3T	35	32	15	40	200			
MEW-40-C32-160-3T	40	32	15	50	160			
MEW-40-C32-200-3T	40	32	15	50	200			

定点倒角刀杆
Spot Drill and Charmfer Tool

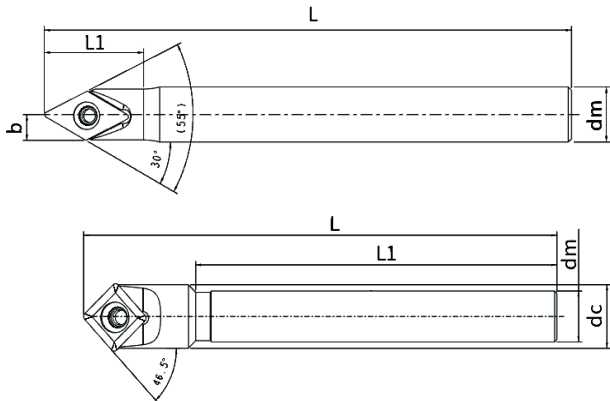


技术参数/Technical Parameters

类型 Type	定点倒角刀杆 Spot Drill and Charmfer Tool	直径大小 Diameter size	8~12mm
螺丝 Screw	M2.5/M3.5/M4	柄径 Shank Diameter	8~12mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	DCEX、SEMX
角度 Angle	90°/60°	刃数 Flutes	单边 Single




规格 Specification	尺寸 Measure			刀粒 Inserts	螺丝 Screw	扳手 Wrench
	dc	dm	L			
SSP-0808-80L-60°	8	8	80	DCEX070204	M2. 5	T8
SSP-1010-110L-60°	10	10	110	DCEX11T304	M4. 0	T15
SSP-1012-110L-60°	10	12	110	DCEX11T304		
YZD-6D-C6-70L-90°	6	6	70	SEMX050204	M2. 5	T8
YZD-8D-C8-80L-90°	8	8	80	SEMX060204		
YZD-D10-100L-90°	12	10	100	SEMX090408	M3. 5	T15
YZD-D12-100L-90°	12	12	100	SEMX090408		

SSP-45° 倒角刀杆
SSP-45° Chamfer Tools

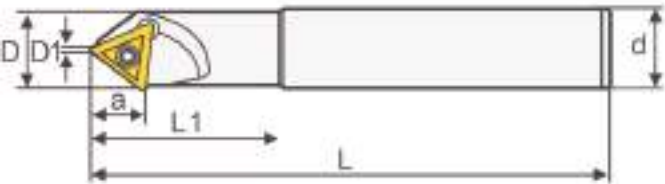

技术参数/Technical Parameters


类型 Type	SSP-45° 倒角刀杆 SSP-45° Chamfer Tools	直径大小 Diameter size	20~25mm
螺丝 Screw	M4	柄径 Shank Diameter	12~20mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	TCMT16T304/APMT1604
角度 Angle	45°/60°	刃数 Flutes	单边 Single




规格 Specification	尺寸 Measure				刀片 Insert	螺丝 Screw	扳手 Wrench
	dc	dm	L1	L			
SSP-20-C12-130	20	12	90	130	TCMT16T304	M4	T15
SSP-20-C16-130	20	16	90	130			
SSP-20-C20-130	20	20	90	130			
SSP-25-C20-130	25	20	90	130			

SSY-30° 倒角刀杆

SSY-30° Chamfer Tools

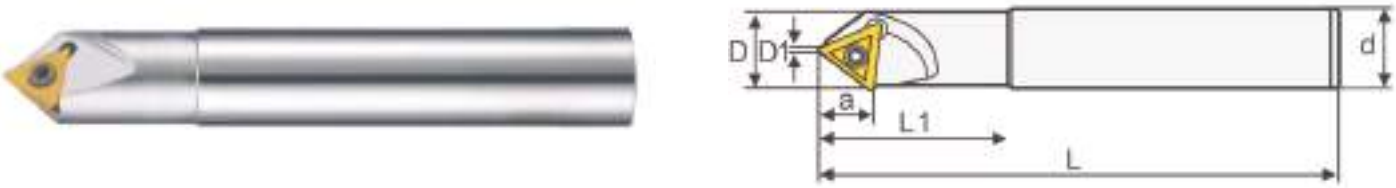

技术参数/Technical Parameters




类型 Type	SSY-30° 倒角刀杆 SSY-30° Chamfer Tools	直径大小 Diameter size	16、25mm
螺丝 Screw	M4	柄径 Shank Diameter	16、20mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	TCMT16T304/APMT1604
角度 Angle	30°	刃数 Flutes	单边 Single


规格 Specification	尺寸 Measure				刀片 Insert	螺丝 Screw	扳手 Wrench
	dc	dm	L1	L			
SSY-16-C16-130	16	16	90	130	TCMT16T304	M4	T15
SSY-25-C20-130	25	20	90	130			

SSK-45° 倒角刀杆

SSK-45° Chamfer Tools

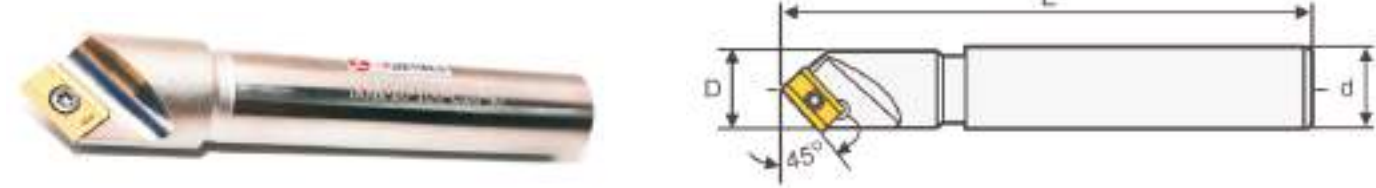

技术参数/Technical Parameters




类型 Type	SSK-45° 倒角刀杆 SSK-45° Chamfer Tools	直径大小 Diameter size	20、25mm
螺丝 Screw	M4	柄径 Shank Diameter	16、20mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	APMT1604
角度 Angle	45°/60°	刃数 Flutes	单边 Single


规格 Specification	尺寸 Measure				刀片 Insert	螺丝 Screw	扳手 Wrench
	dc	dm	L1	L			
SSK-20-C16-130	20	16	90	130	APMT1604	M4	T15
SSK-20-C20-150	20	20	125	150			
SSK-25-C20-150	25	20	125	150			

T型铣刀杆

T Type Milling Holder

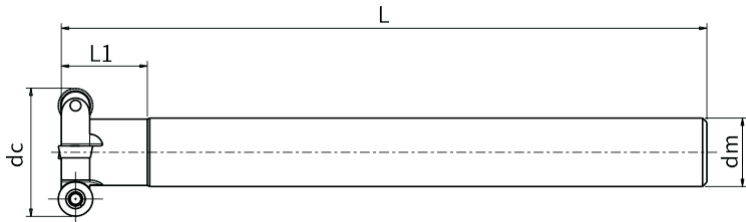

技术参数/Technical Parameters




类型 Type	T型铣刀杆 T Type Milling Holder	直径大小 Diameter size	20~80mm
螺丝 Screw	M2.5/M3/4	柄径 Shank Diameter	14~32mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	RCMT0602 RPMT0802 RPMT10T3 RPMT1204
角度 Angle	180°	刃数 Flutes	4~5mm


规格 Specification	尺寸 Measure				刀粒 Insert	螺丝 Screw	扳手 Wrench
	dc	dm	L1	L			
20xR3x14x150x4T	20	14	20	150	RCMT0602 RPMT0802 RPMT10T3 RPMT1204	M2.5 M3 M4	T8 T10 T15
25xR3x16x150x4T	25	16	20	150			
30xR3x16x150x4T	30	16	20	150			
30xR4x16x150x4T	30	16	20	150			
35xR3x20x150x4T	35	20	20	150			
35xR4x20x150x4T	35	20	20	150			
40xR3x20x150x4T	40	20	20	150			
40xR4x20x150x5T	40	20	20	150			
40xR5x20x150x4T	40	20	20	150			
50xR4x20x150x5T	50	20	20	150			
50xR5x20x150x4T	50	20	25	150			
50xR6x20x150x4T	50	20	30	150			
60xR5x25x150x5T	60	25	30	150			
60xR6x25x150x4T	60	25	35	150			
80xR5x32x150x6T	80	32	35	150			
80xR6x32x150x5T	80	32	35	150			

AP 桥式面铣刀

AP Bridge Type Face Milling Cutter

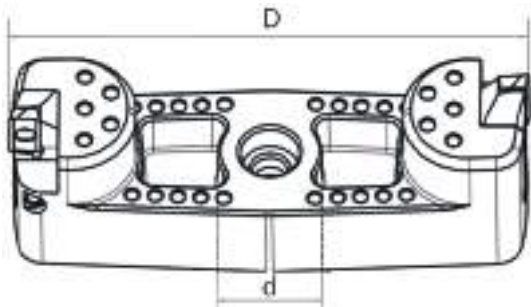

技术参数/Technical Parameters



类型 Type	AP 桥式面铣刀 AP Bridge Type Face Milling Cutter	加工范围 Working Scope	100~500mm
螺丝 Screw	M4	孔大小 Hole Size	22~40mm
材质 Material	航空铝 Aviation aluminum	适用刀粒 Inserts	APKT1604
角度 Angle	90°	刃数 Flutes	2T

类型 Type	规格 Specification	尺寸 Measure			刀粒 Inserts	螺丝 Screw	扳手 Wrench
		D	d	T			
微型可调型 Micro adjustable type	AP100-22-2T	100	22	2	APKT1604	M4	T15
	AP125-22-2T	125	22	2			
	AP160-22-2T	160	22	2			
	AP200-32-2T	200	32	2			
	AP250-22-2T	250	22	2			
	AP280-32-2T	280	32	2			
	AP315-32-2T	315	32	2			
	AP360-40-2T	360	40	2			
	AP410-40-2T	401	40	2			
	AP500-40-2T	500	40	2			
不可调型 The Unadjustable type	AP100-22-2T	100	22	2			
	AP125-22-2T	125	22	2			
	AP160-22-2T	160	22	2			
	AP180-22-2T	180	22	2			
	AP200-32-2T	200	32	2			

SE 桥式面铣刀

SE Bridge Type Face Milling Cutter




技术参数/Technical Parameters

类型 Type	SE 桥式面铣刀 SE Bridge Type Face Milling Cutter	加工范围 Working Scope	100~650mm
螺丝 Screw	M5	孔大小 Hole Size	22~40mm
材质 Material	航空铝 Aviation Aluminum	适用刀粒 Inserts	SEHT1204
角度 Angle	45°	刃数 Flutes	2T

类型 Type	规格 Specification	尺寸 Measure			刀粒 Inserts	螺丝 Screw	扳手 Wrench
		D	d	T			
微型可调型 Micro adjustable type	SE100-22-2T	100	22	2	SEHT1204	M5	T20
	SE125-22-2T	125	22	2			
	SE160-22-2T	160	22	2			
	SE200-32-2T	200	32	2			
	SE250-22-2T	250	22	2			
	SE280-32-2T	280	32	2			
	SE315-32-2T	315	32	2			
	SE360-40-2T	360	40	2			
	SE500-40-2T	500	40	2			
	SE650-40-2T	650	40	2			
整体式 The whole type	SE80-22-2T	80	22	2	SEHT1204	M5	T20
	SE100-22-2T	100	22	2			
	SE125-22-2T	125	22	2			
	SE160-22-2T	160	22	2			
	SE180-22-2T	180	22	2			
	SE200-32-2T	200	32	2			

HEM90 玉米铣刀

HEM90 Corn Milling Holder

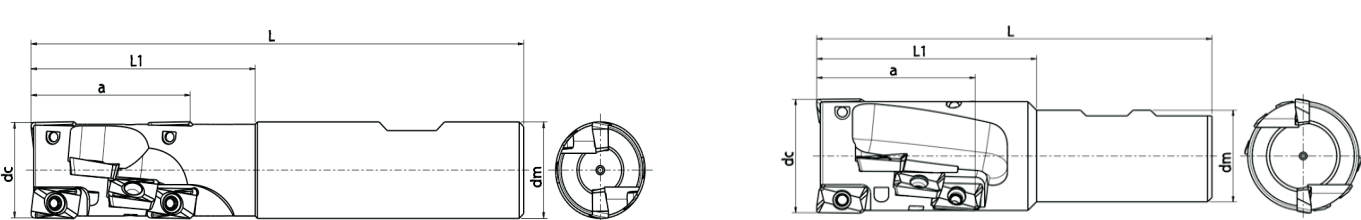


技术参数/Technical Parameters

类型 Type	HEM90 玉米铣刀 HEM90 Corn Milling Holder	直径大小 Diameter size	20~50mm
螺丝 Screw	M3/M4	柄径 Shank Diameter	20~32mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	APMT1604、1135
角度 Angle	90°	刃数 Flutes	8~20T

规格 Specification	尺寸 Measure					刃数 Flutes	刀片数 Number	刀粒 Inserts	备注 Remarks
	dc	dm	a	L1	L				
20AP11-35/110-2	20	20	48	35	110	2	8	APMT1604 APMT1135	Drawing 2
25AP11-35/120-2	25	25	40	35	120	2	8		Drawing 2
20AP11-55/135-2	20	20	53	55	135	2	12		Drawing 2
32AP16-55/135-2	32	32	58	55	135	2	12		Drawing 2
40AP16-55/135-2	40	32	58	55	135	2	12		Drawing 2
50AP16-55/135-4	50	32	58	55	135	4	16		Drawing 2
32AP16N-70-150-2T	32	32	72	70	150	2	10		Drawing 2
32AP16N-95-175-2T	32	32	68	95	175	2	8		Drawing 2
40AP16N-70-150-3T	40	32	72	70	150	3	15		Drawing 2
50AP16N-55-135-4T	50	32	68	55	135	4	16		Drawing 2
50AP16N-70-150-4T	50	32	72	70	150	4	20		Drawing 2

HEM90 玉米铣刀

HEM90 Corn Milling Endmill

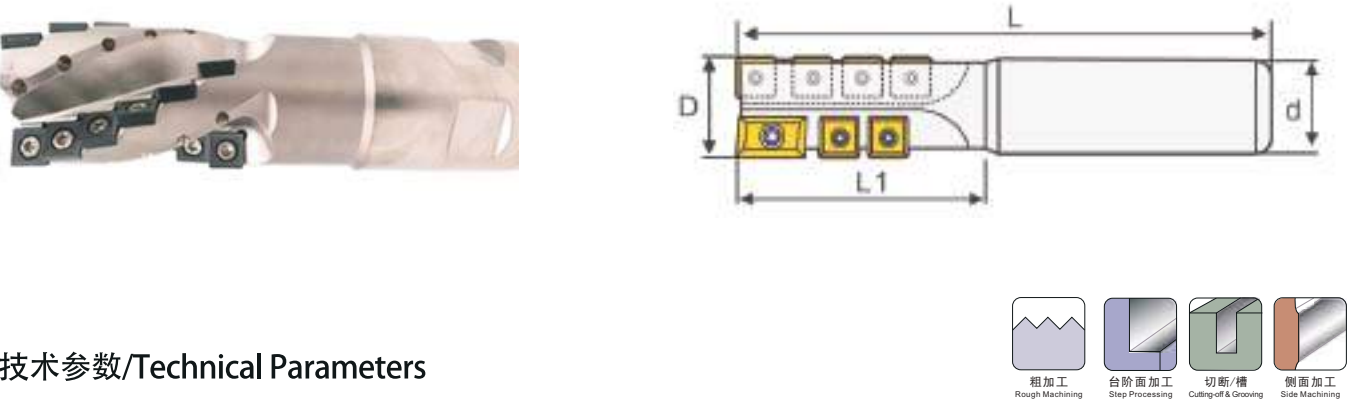


技术参数/Technical Parameters

类型 Type	HEM90 玉米铣刀杆 HEM90 Corn Milling Holder	直径大小 Diameter size	50mm
螺丝 Screw	M3/M4	柄径 Shank Diameter	50.8mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	SPMT4572/PM APKT150412PM
角度 Angle	90°	刃数 Flutes	18~29T

规格 Specification	尺寸 Measure					刃数 Flutes	刀片数 Number	刀粒 Insert
	dc	dm	a	L1	L			
D50L8018S508	50	50.8	80	120	205	3	18	SPMT4572/PM APKT150412PM
D50L12529S508	50	50.8	125	165	250	3	29	

锯片刀杆

Saw Cutter Holder

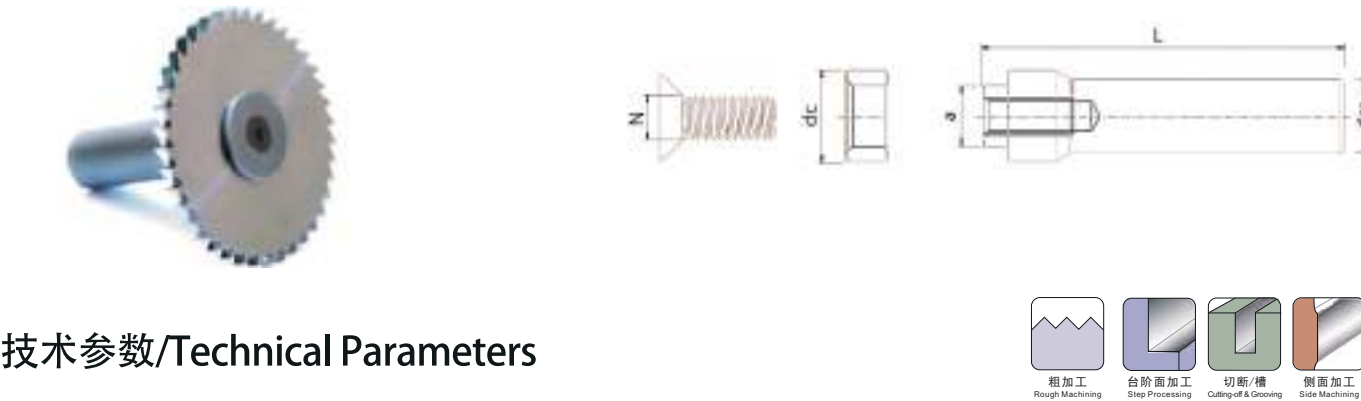


技术参数/Technical Parameters

类型 Type	锯片刀杆 Saw cutter holder	加工范围 Working Scope	10~32mm
螺丝 Screw	M4/M5/M6/M8	材质 Material	特殊合金钢 Special Alloy Steel


规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	dc	dm	L	N	a			
6x10x60LxD10	10	10	60	M4	6	不同尺寸的硬质合金锯 Carbide Saw with different dimension	M4	M4
6x10x60LxD6	10	6	60	M4	6		M5	M5
8x12x70LxD12	12	12	70	M5	8		M6	M6
8x12x70LxD8	12	8	70	M5	8		M8	M8
10x16x70LxD12	16	12	70	M6	10			
10x16x70LxD10	16	10	70	M6	10			
13x18x75LxD12	18	12	75	M8	13			
13x18x75LxD10	18	10	75	M8	13			
16x22x75LxD16	22	16	75	M8	16			
16x22x75LxD12	22	12	75	M8	16			
22x28x90LxD20	28	20	90	M8	22			
22x28x90LxD16	28	16	90	M8	22			
25x32x100LxD20	32	20	100	M8	25			

SE12面铣微尘铣刀

SE12 Face Milling Micro Adjust mliing Cutter

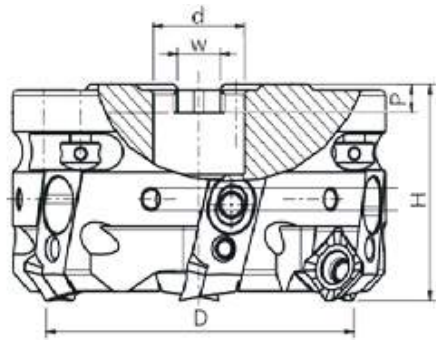

技术参数/Technical Parameters



类型 Type	SE12面铣微尘铣刀 SE12 Face Milling Micro Adjust mliing Cutter	加工范围 Working Scope	63~315mm
螺丝 Screw	M5	孔大小 Hole Size	22~40mm
材质 Material	航空铝 Aviation Aluminum	适用刀粒 Inserts	SEHT1204
角度 Angle	45°	刃数 Flutes	5~15T



规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
SE63-22-5T	63	22	50	10.4	6.3	SEHT1204	M5	T20
SE80-27-6T	80	27	50	10.4	6.3			
SE100-32-7T	100	32	50	14.4	8			
SE125-40-8T	125	40	50	14.4	8			
SE160-40-10T	160	40	50	14.4	8			
SE200-40-10T	200	40	50	16.4	8			
SE255-40-12T	255	40	63	16.4	9			
SE315-40-15T	315	40	63	16.4	9			

刀盘 / Milling Tools



MXG 高进给铣刀盘

MGX Hi-feed Milling Cutterhead

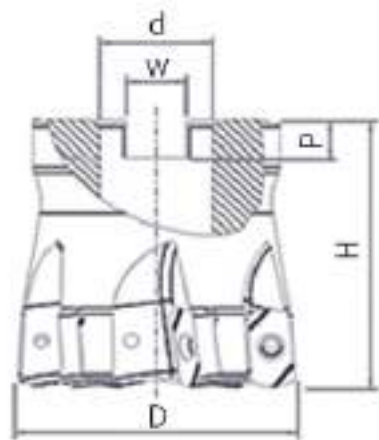



技术参数/Technical Parameters

类型 Type	MXG 高进给铣刀盘 MGX Hi-feed Milling Cutterhead	加工范围 Working Scope	40~63mm
螺丝 Screw	M2.5*6.5	中心孔尺寸 Center Hole Size	22mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	ENMU1004
冷却方式 Cooling Method	冷却液孔 Coolant Hole	刃数 Flutes	6~8T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
MXG-40-22-6T-C	40	22	40	8.4	5.6	ENMU1004	M2.5*6.5	T8
MXG-50-22-8T-C	50	22	45	10.4	6.3			
MXG-63-22-8T-C	63	22	45	10.4	6.3			

MFH03 高进给铣刀盘

MFH03 Hi-feed Milling Cutterhead


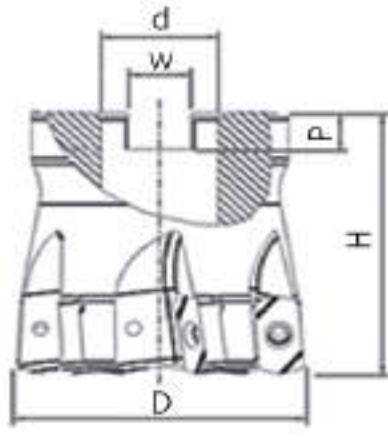


技术参数/Technical Parameters

类型 Type	MFH03 高进给铣刀盘 MFH03 Hi-feed Milling Cutterhead	加工范围 Working Scope	40~125mm
螺丝 Screw	M3	中心孔尺寸 Center Hole Size	16~40mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	LOGU030310ER
冷却方式 Cooling Method	冷却液孔 Coolant Hole	刃数 Flutes	6~14T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
MFH03R-40-16-6T	40	16	40	8.4	5.6	LOGU030310ER	M3	T10
MFH03R-40-22-6T	40	22	40	8.4	5.6			
MFH03R-50-22-8T	50	22	45	10.4	6.3			
MFH03R-63-22-9T	63	22	45	10.4	6.3			
MFH03R-80-27-10T	80	27	50	12.4	7			
MFH03R-100-32-12T	100	32	55	14.4	8			
MFH03R-125-40-14T	125	40	63	16.4	9.5			
MFH03R-40-22-6T-C	Coolant	40	22	40	8.4	LOGU030310ER	M3	T10
MFH03R-50-22-8T-C	Coolant	50	22	45	10.4			
MFH03R-63-22-8T-C	Coolant	63	22	45	10.4			

EXN03R 高进给铣刀盘
EXN03R Hi-feed Milling Cutterhead


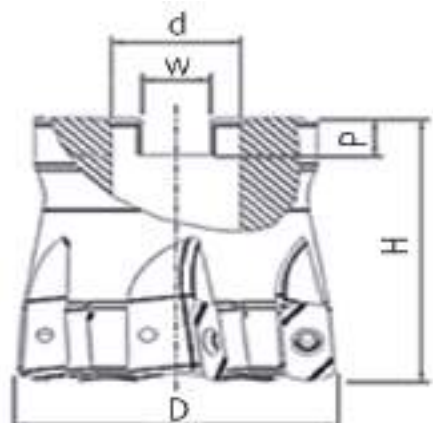


技术参数/Technical Parameters

类型 Type	EXN03R 高进给铣刀盘 EXN03R Hi-feed Milling Cutterhead	加工范围 Working Scope	40~125mm
螺丝 Screw	M2.5	中心孔尺寸 Center Hole Size	16~40mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	LNMU0303
冷却方式 Cooling Method	冷却液孔 Coolant Hole	刃数 Flutes	6~14T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
40-16-6T	40	16	40	8.4	5.6	LNMU0303	M2.5	T8
50-22-8T	50	22	45	10.4	6.3			
63-22-9T	63	22	45	10.4	6.3			
80-27-10T	80	27	50	12.4	7			
100-32-12T	100	32	55	14.4	8			
125-40-14T	125	40	63	16.4	9.5	LNMU0303	M2.5	T8
40-22-6T-C	Coolant	40	22	40	8.4			
50-22-8T-C	Coolant	50	22	45	10.4			
63-22-8T-C	Coolant	63	22	45	10.4			

TEBL 高进给铣刀盘
TEBL Hi-feed Milling Cutterhead

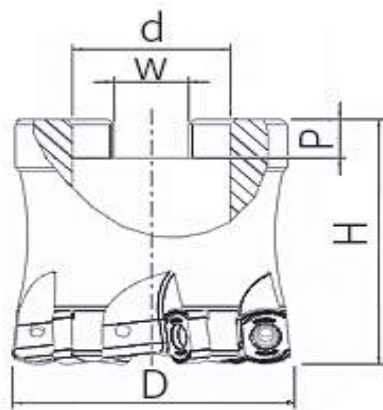



技术参数/Technical Parameters

类型 Type	TEBL 高进给铣刀盘 TEBL Hi-feed Milling Cutterhead	加工范围 Working Scope	40~125mm
螺丝 Screw	M2.5 / M3.5	中心孔尺寸 Center Hole Size	16~40mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	BLMP0603R BLMP0904R

规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
TEBL06-40-22-6T	40	22	40	10.4	6.3	BLMP0603R	M2.5	T8
TEBL06-50-22-6T	50	22	45	10.4	6.3			
TEBL06-40-22-6T	40	22	40	10.4	6.3			
TEBL09-40-16-5T	40	16	40	8.4	5.6	BLMP0904R	M3.5	T15
TEBL09-50-22-5T	50	22	45	10.4	6.3			
TEBL09-52-22-6T	52	22	45	10.4	6.3			
TEBL09-63-22-6T	63	22	45	10.4	6.3			
TEBL09-80-27-8T	80	27	50	12.4	7			
TEBL09-100-32-9T	100	32	55	14.4	8			
TEBL09-125-40-12T	125	40	55	16.4	9.5			

LN11 方肩铣刀盘

LN11 Shoulder Milling Cutterhead

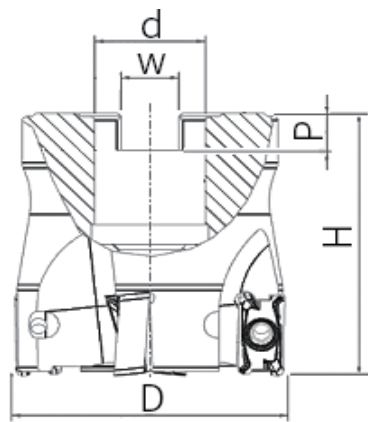



技术参数/Technical Parameters

类型 Type	LN11 方肩铣刀盘 LN11 Shoulder Milling Cutterhead	加工范围 Working Scope	40~80mm
螺丝 Screw	M3	中心孔尺寸 Center Hole Size	16~27mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	LNMU110408
角度 Angle	90°	刃数 Flutes	6~10T

规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
LN11-D040Z04S16	40	16	40	8.4	5.6	LNMU110408 LNGU110408	M3	T10
LN11-D040Z06S16	40	16	40	8.4	5.6			
LN11-D050Z05S22	50	22	45	10.4	6.3			
LN11-D050Z07S22	50	22	45	10.4	6.3			
LN11-D063Z06S22	63	22	45	10.4	6.3			
LN11-D063Z09S22	63	22	45	10.4	6.3			
LN11-D080Z08S27	80	27	55	12.4	7			
LN11-D080Z10S27	80	27	55	12.4	7			

LN15 方肩铣刀盘

LN15 Shoulder Milling Cutterhead

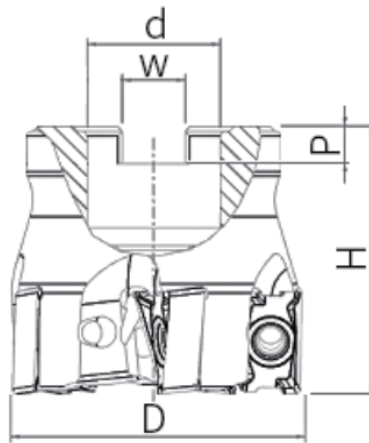


技术参数/Technical Parameters


类型 Type	LN15 方肩铣刀盘 LN15 Shoulder Milling Cutterhead	加工范围 Working Scope	40~160mm
螺丝 Screw	M4.5	中心孔尺寸 Center Hole Size	16~40mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	LNGU15T608
角度 Angle	90°	刃数 Flutes	5~12T

规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
LN15-D040Z05S16	40	16	40	8.4	5.6	LNGU15T608	M4.5	T15
LN15-D050Z04S22	50	22	45	10.4	6.3			
LN15-D050Z05S22	50	22	45	10.4	6.3			
LN15-D063Z05S22	63	22	45	10.4	6.3			
LN15-D063Z06S22	63	22	45	10.4	6.3			
LN15-D080Z05S27	80	27	50	12.4	7			
LN15-D080Z07S27	80	27	55	12.4	7			
LN15-D100Z06S32	100	32	55	14.4	8			
LN15-D100Z08S32	100	32	55	14.4	8			
LN15-D125Z07S40	125	40	63	16.4	9.5			
LN15-D125Z09S40	125	40	63	16.4	9.5			
LN15-D160Z08S40	160	40	63	16.4	9.5			
LN15-D160Z12S40	160	40	63	16.4	9.5			

MFPN66 高进给铣刀盘
MFPN66 Hi-feed Milling Cutterhead

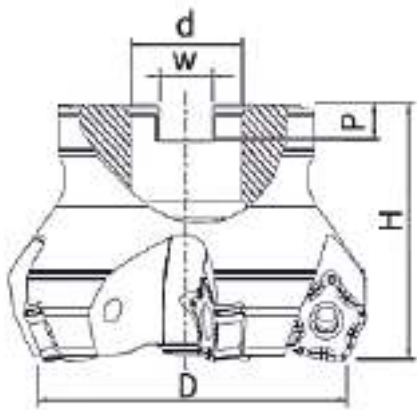


技术参数/Technical Parameters




类型 Type	MFPN66 高进给铣刀盘 MFPN66 Hi-feed Milling Cutterhead	加工范围 Working Scope	50~160mm
螺丝 Screw	M4.5	中心孔尺寸 Center Hole Size	22~40mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	PNMU090508
角度 Angle	66°	刃数 Flutes	4~11T

规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
MFPN66-50-22-4T	50	22	45	10.4	6.3	PNMU090508	M4.5	T15
MFPN66-63-22-5T	63	22	45	10.4	6.3			
MFPN66-80-27-6T	80	27	50	12.4	7			
MFPN66-100-32-7T	100	32	55	14.4	8			
MFPN66-125-40-9T	125	40	55	16.4	9.5			
MFPN66-160-40-11T	160	40	55	16.4	9.5			

MFSN88 高进给铣刀盘
MFSN88 Hi-feed Milling Cutterhead

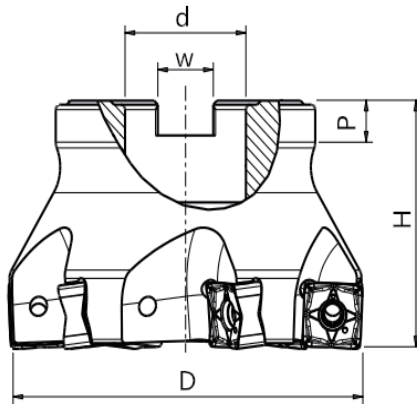

技术参数/Technical Parameters




类型 Type	MFSN88 高进给铣刀盘 MFSN88 Hi-feed Milling Cutterhead	加工范围 Working Scope	50~200mm
螺丝 Screw	M4.5	中心孔尺寸 Center Hole Size	22~60mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	SNMU1305
角度 Angle	88°	刃数 Flutes	4~13T

规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
MFSN88-50-22-4T	50	22	45	10.4	6.3	SNMU1305	M4.5	T15
MFSN88-63-22-5T	63	22	45	10.4	6.3			
MFSN88-80-27-6T	80	27	50	12.4	7			
MFSN88-100-32-7T	100	32	55	14.4	8			
MFSN88-125-40-9T	125	40	55	16.4	9.5			
MFSN88-160-40-11T	160	40	55	16.4	9.5			
MFSN88-200-60-13T	200	60	63	25.7	14			


SNKX 高进给铣刀盘

SNKX Hi-feed Milling Cutterhead

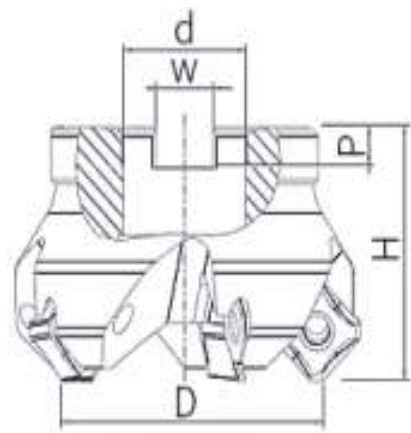

技术参数/Technical Parameters


类型 Type	SNKX 高进给铣刀盘 SNKX Hi-feed Milling Cutterhead	加工范围 Working Scope	50~315mm
螺丝 Screw	M5	中心孔尺寸 Center Hole Size	22~60mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	SNMU130508 ONMU050508
角度 Angle	45°	刃数 Flutes	5~20T



规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
50-22-5T	50	22	40	10.4	6.3	SNMU130508 ONMU050508	M5	T20
63-22-6T	63	22	40	10.4	6.3			
80-27-7T	80	27	50	12.4	7			
100-32-8T	100	32	55	14.4	8			
125-40-10T	125	40	63	16.4	9.5			
160-40-12T	160	40	63	16.4	9.5			
200-60-14T	200	60	63	25.7	14			
250-60-16T	250	60	63	25.7	14			
315-60-20T	315	60	63	25.7	14			


4NKT 高进给铣刀盘

4NKT Hi-feed Milling Cutterhead

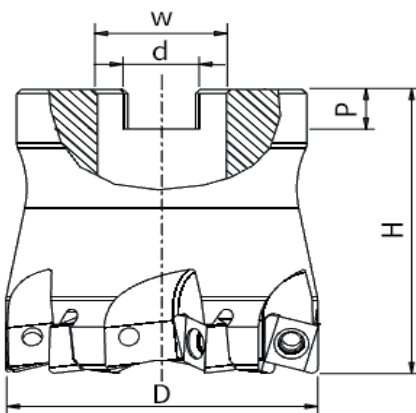



技术参数/Technical Parameters

类型 Type	4NKT 高进给铣刀盘 4NKT Hi-feed Milling Cutterhead	加工范围 Working Scope	40~80mm
螺丝 Screw	M3	中心孔尺寸 Center Hole Size	16~27mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	4NKT060308



规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
4NKT-40-16-6T	40	16	40	8.4	5.6	4NKT060308	M3	T10
4NKT-50-22-7T	50	22	45	10.4	6.3			
4NKT-63-22-8T	63	22	45	10.4	6.3			
4NKT-80-27-10T	80	27	50	12.4	7			

ON05 高进给铣刀盘
ON05 Hi-feed Milling Cutterhead


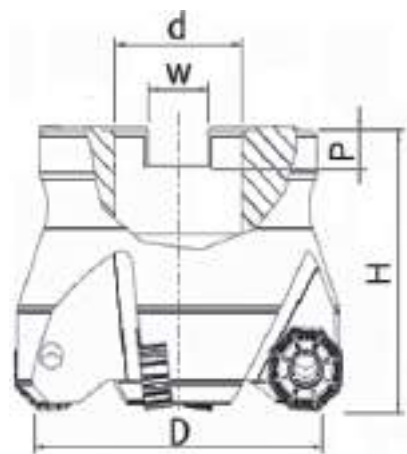


技术参数/Technical Parameters

类型 Type	ON05 高进给铣刀盘 ON05 Hi-feed Milling Cutterhead	加工范围 Working Scope	40~200mm
螺丝 Screw	M4.5	中心孔尺寸 Center Hole Size	16~40mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	ONMU0504
角度 Angle	135°	刃数 Flutes	4~12T

规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
40A04R-S42-ON05	40	16	40	8.4	5.6	ONMU0504	M4.5	T20
50A04R-S42-ON05	50	22	45	10.4	6.3			
63A05R-S42-ON05	63	22	45	10.4	6.3			
63A07R-S42-ON05	63	22	45	10.4	6.3			
80A06R-S42-ON05	80	27	50	12.4	7			
80A09R-S42-ON05	80	27	50	12.4	7			
100A08R-S42-ON05	100	32	55	14.4	8			
100A11R-S42-ON05	100	32	55	14.4	8			
125A09R-S42-ON05	125	40	63	16.4	9.5			
125A14R-S42-ON05	125	40	63	16.4	9.5			
160A10R-S42-ON05	160	40	63	16.4	9.5			
160A16R-S42-ON05	160	40	63	16.4	9.5			

CSDR 高进给铣刀盘
CSDR Hi-feed Milling Cutterhead

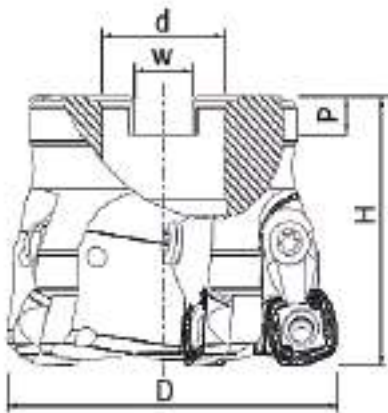



技术参数/Technical Parameters

类型 Type	CSDR 高进给铣刀盘 CSDR Hi-feed Milling Cutterhead	加工范围 Working Scope	50~80mm
螺丝 Screw	M4	中心孔尺寸 Center Hole Size	22、27mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	SDMT1205

规格 Specification	尺寸 Measure					刀粒 Insert Type	螺丝 Screw	扳手 Wrench
	D	d	H	W	T			
50-22-4T	50	22	45	10.4	6.3	SDMT1205	M4	T15
63-22-5T	63	22	45	10.4	6.3			
80-27-6T	80	27	50	12.4	7			

EMR 面铣刀盘

EMR Face Milling Cutterhead

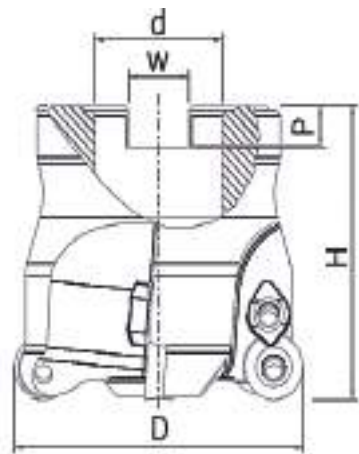



技术参数/Technical Parameters

类型 Type	EMR 面铣刀盘 EMR Face Milling Cutterhead	加工范围 Working Scope	40~200mm
螺丝 Screw	M3.5/M4	中心孔尺寸 Center Hole Size	22~40mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	RPMW1003 RPMW1204

规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
EMR5R-50-22-4T	50	22	45	10.4	6.3	RPMW1003	M3.5	T15 5R压板
EMR5R-63-22-4T	63	22	45	10.4	6.3			
EMR5R-80-27-6T	80	27	50	12.4	7			
EMR5R-100-32-6T	100	32	50	14.4	8			
EMR5R-125-40-7T	125	40	55	16.4	9.5			
EMR6R-50-22-4T	50	22	45	10.4	6.3	RPMW1204	M4	T15 6R压板
EMR6R-63-22-4T	63	22	50	10.4	6.3			
EMR6R-80-27-6T	80	27	50	12.4	7			
EMR6R-100-32-6T	100	32	50	12.4	7			
EMR6R-125-40-7T	125	40	55	16.4	9.5			
EMR6R-160-40-10T	160	40	63	16.4	9.5			

KM12 面铣刀盘

KM12 Face Milling Cutter


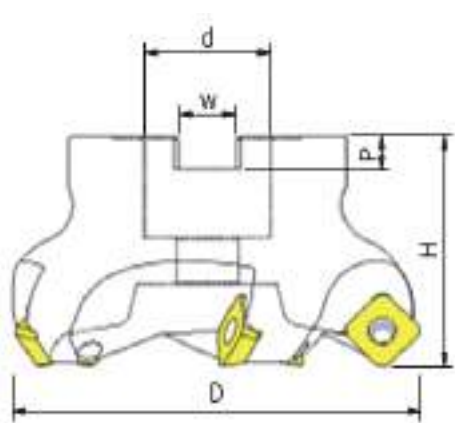


技术参数/Technical Parameters

类型 Type	KM12 面铣刀盘 KM12 Face Milling Cutter	加工范围 Working Scope	50~200mm
螺丝 Screw	M5	中心孔尺寸 Center Hole Size	22~60mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	SEKT1204AFTN
角度 Angle	45°	刃数 Flutes	4~8T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
50-22-4T	50	22	45	10.4	6.3	SEKT1204AFTN	M5	T20
63-22-4T	63	22	45	10.4	6.3			
80-22-6T	80	27	50	12.4	7			
100-32-6T	100	32	55	14.4	8			
125-40-8T	125	40	55	16.4	9.5			
160-40-8T	160	40	55	16.4	9.5			
200-60-8T	200	60	60	25.4	14			



SE12 铝用面铣刀盘
SE12 Face Milling Cutterhead for Aluminum

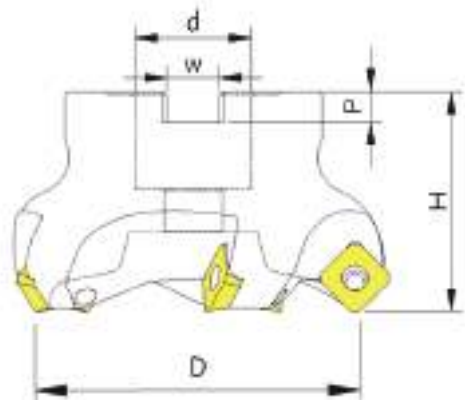

技术参数/Technical Parameters

类型 Type	SE12 铝用面铣刀盘 SE12 Face Milling Cutterhead for Aluminum	加工范围 Working Scope	50~250mm
螺丝 Screw	M5	中心孔尺寸 Center Hole Size	22~60mm
材质 Material	航空铝 Aviation aluminum	适用刀粒 Inserts	SEHT1204
角度 Angle	45°	刃数 Flutes	4~10T

BAP300/400 方肩铣刀盘
BAP300/400 Shoulder Milling Cutterhead

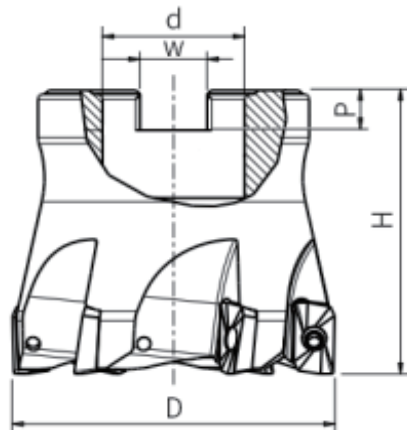



技术参数/Technical Parameters

类型 Type	BAP300/400 方肩铣刀盘 BAP300/400 Shoulder Milling Cutterhead	加工范围 Working Scope	40~200mm
螺丝 Screw	M2.5 / M4	中心孔尺寸 Center Hole Size	22~60mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	APMT1135PDER、 APMT1604PDER
角度 Angle	90°	刃数 Flutes	4~12mm

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
50-22-4T	50	22	50	10.4	6.3	SEHT1204	M5	T20
63-22-4T	63	22	50	10.4	6.3			
80-22-6T	80	22	50	12.4	7			
80-27-6T	80	27	50	12.4	7			
100-22-6T	100	22	50	14.4	8			
100-27-6T	100	27	50	14.4	8			
100-32-6T	100	32	50	14.4	8			
125-22-6T	125	22	63	16.4	9			
125-27-6T	125	27	63	16.4	9			
125-32-6T	125	32	63	16.4	9			
125-40-6T	125	40	63	16.4	9			
160-27-8T	160	27	63	16.4	9			
160-32-8T	160	32	63	16.4	9			
160-40-8T	160	40	63	16.4	9			
200-40-10T	200	40	63	16.4	9			
250-60-10T	250	60	63	16.4	9			

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
BAP300R-40-22-4T	40	22	50	10.4	6.3	APMT1135PDER	M2.5	T8
BAP300R-50-22-6T	50	22	50	10.4	6.3			
BAP300R-63-22-8T	63	22	50	10.4	6.3			
BAP400R-40-16-4T	40	16	45	10.4	6.3	APMT1604PDER	M4	T15
BAP400R-40-22-4T	40	22	45	10.4	6.3			
BAP400R-50-22-4T	50	22	45	10.4	6.3			
BAP400R-63-22-4T	63	22	45	10.4	6.3			
BAP400R-63-22-5T	63	22	45	10.4	6.3			
BAP400R-80-27-6T	80	27	55	12.4	7			
BAP400R-100-32-8T	100	32	55	14.4	8			
BAP400R-125-40-8T	125	40	55	16.4	9.5			
BAP400R-160-40-10T	160	40	55	16.4	9.5			
BAP400R-200-60-12T	200	60	60	25.4	14			

AP16 微型刀盘
AP16 Shoulder Milling Micro Adjust Cutterhead


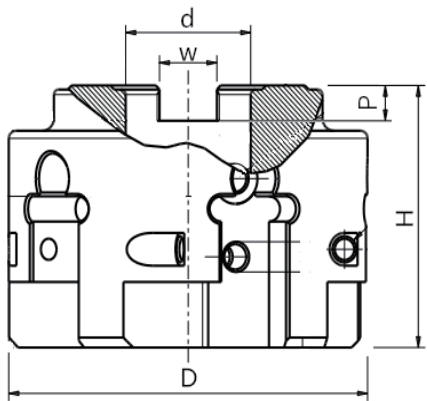


技术参数/Technical Parameters

类型 Type	AP16 微型刀盘 AP16 shoulder milling micro adjust cutterhead	加工范围 Working Scope	63~315mm
螺丝 Screw	M4	中心孔尺寸 Center Hole Size	22~40mm
材质 Material	航空铝 Aviation aluminum	适用刀粒 Inserts	APKT1604
角度 Angle	90°	刃数 Flutes	5~15T

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	H	W	T			
AP63-22-5T	63	22	50	10.4	6.3	APKT1604	M4	T15
AP80-27-6T	80	27	50	10.4	6.3			
AP100-32-7T	100	32	50	14.4	8			
AP125-40-8T	125	40	50	14.4	8			
AP160-40-10T	160	40	50	14.4	8			
AP200-40-10T	200	40	50	16.4	8			
AP255-40-12T	255	40	63	16.4	9			
AP315-40-15T	315	40	63	16.4	9			

MFWN06/09 方肩铣刀盘
MFWN06/09 Shoulder Milling Cutterhead


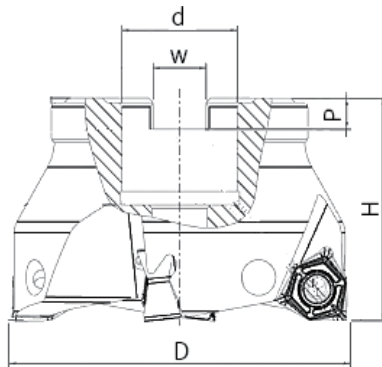


技术参数/Technical Parameters

类型 Type	MFWN06/09 方肩铣刀盘 MFWN06/09 Shoulder Milling Cutterhead	加工范围 Working Scope	50~160mm
螺丝 Screw	M4	中心孔尺寸 Center Hole Size	22~40mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	WNMU080608
角度 Angle	90°	刃数 Flutes	4~14T

类型 Type	规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
		D	d	H	W	P			
MFWN60	60050R-22-4T-M	50	22	45	10.4	6.3	WNMU060408	M4	T15
	60063R-22-6T-M	63	22	45	10.4	6.3			
	60080R-27-8T-M	80	27	55	12.4	7			
	60100R-32-10T-M	100	32	55	14.4	8			
	60125R-40-12T-M	125	40	55	16.4	9.5			
	60160R-40-14T-M	160	40	55	16.4	9.5			

MFWN06/09 方肩铣刀盘
MFWN06/09 Shoulder Milling Cutterhead


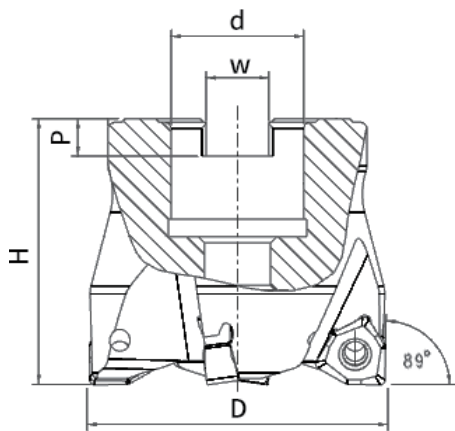


技术参数/Technical Parameters

类型 Type	MFWN06/09 方肩铣刀盘 MFWN06/09 Shoulder Milling Cutterhead	加工范围 Working Scope	50~200mm
螺丝 Screw	M4.5	中心孔尺寸 Center Hole Size	22~60mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	WNMU080608
角度 Angle	90°	刃数 Flutes	4~16T

类型 Type	规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
		D	d	H	W	P			
MFWN90	90050R-4T-M	50	22	45	10.4	6.3	WNMU0806	M4.5	T20
	90063R-4T-M	63	22	45	10.4	6.3			
	90063R-5T-M	63	22	45	10.4	6.3			
	90080R-4T-M	80	27	50	12.4	7			
	90080R-5T-M	80	27	50	12.4	7			
	90080R-7T-M	80	27	50	12.4	7			
	90100R-5T-M	100	32	55	14.4	8			
	90100R-7T-M	100	32	55	14.4	8			
	90100R-9T-M	100	32	55	14.4	8			
	90125R-6T-M	125	40	55	16.4	9.5			
	90125R-8T-M	125	40	55	16.4	9.5			
	90125R-12T-M	125	40	55	16.4	9.5			
	90160R-8T-M	160	40	63	16.4	9.5			
	90160R-10T-M	160	40	63	16.4	9.5			
	90160R-14T-M	160	40	63	16.4	9.5			
	90200R-10T-M	200	60	63	25.7	14			
	90200R-12T-M	200	60	63	25.7	14			
	90200R-16T-M	200	60	63	25.7	14			

MFXN08 方肩铣刀盘
MFXN08 Shoulder Milling Cutterhead

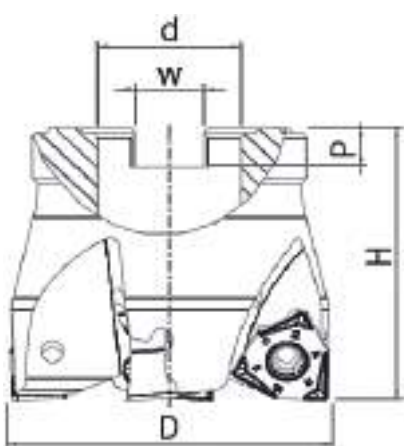



技术参数/Technical Parameters

类型 Type	MFXN08 方肩铣刀盘 MFXN08 Shoulder Milling Cutterhead	加工范围 Working Scope	50~250mm
螺丝 Screw	M4.5	中心孔尺寸 Center Hole Size	22~60mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	XNMX080608
角度 Angle	90°	刃数 Flutes	4~14T

规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
90-50-22-4T	50	22	45	10.4	6.3	XNMX080608	M4.5	T20
90-63-22-4T	63	22	45	10.4	6.3			
90-63-22-5T	63	22	45	10.4	6.3			
90-63-22-6T	63	22	45	10.4	6.3			
90-80-27-6T	80	27	50	12.4	7			
90-100-32-7T	100	32	55	14.4	8			
90-125-40-8T	125	40	63	16.4	9.5			
90-160-40-10T	160	40	63	16.4	9.5			
90-200-60-12T	200	60	63	25.7	14			
90-250-60-14T	250	60	63	25.7	14			

VCGT 粗铣刀盘

VCGT Rough Milling Cutterhead

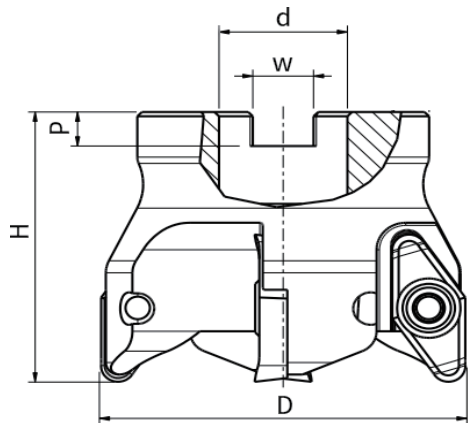



技术参数/Technical Parameters

类型 Type	VCGT 粗铣刀盘 VCGT Rough Milling Cutterhead	加工范围 Working Scope	50~100mm
螺丝 Screw	M5	中心孔尺寸 Center Hole Size	22~32mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	VCGT220530F

规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
VCGT-50-22-3T	50	22	45	10.4	6.3	VCGT220530F	M5	T20
VCGT-50-22-4T	50	22	45	10.4	6.3			
VCGT-63-22-4T	63	22	45	10.4	6.3			
VCGT-80-27-4T	80	27	55	12.4	7			
VCGT-100-32-5T	100	32	55	14.4	8			

R217.96 方肩铣刀盘

R217.96 Shoulder Milling Cutterhead

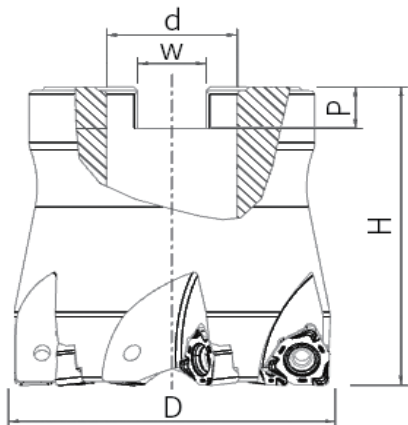


技术参数/Technical Parameters

类型 Type	R217.96 方肩铣刀盘 R217.96 Shoulder MillingCutter	加工范围 Working Scope	40~63mm
螺丝 Screw	M2.5	中心孔尺寸 Center Hole Size	16、22mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	WNMU0404


规格 Specification	尺寸Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
R217.96-40-16-5T	40	16	40	8.4	5.6	WNMU0404	M2.5	T8
R217.96-50-22-5T	50	22	45	10.4	6.3			
R217.96-63-22-6T	63	22	45	10.4	6.3			

S45HN09 高进给铣刀盘
S45HN09 Hi-feed Milling Cutterhead

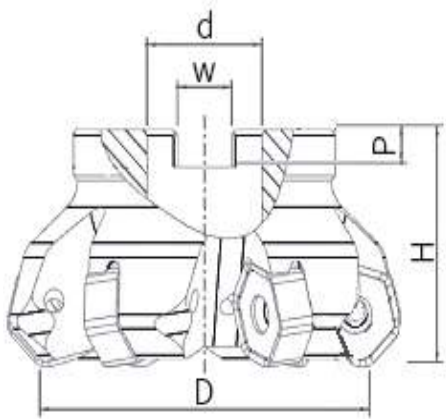


技术参数/Technical Parameters

类型 Type	S45HN09 高进给铣刀盘 S45HN09 Hi-feed Milling Cutterhead	加工范围 Working Scope	50~315mm
螺丝 Screw	M4.5	中心孔尺寸 Center Hole Size	22~60mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	HNGX090608
角度 Angle	45°	刃数 Flutes	4~16 T




规格 Specification	尺寸 Measure					刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
50A04R-S45HN09C	50	22	40	10.4	6.3	HNGX090608	M4.5	T20
63A06R-S45HN09C	63	22	50	10.4	6.3			
80A06R-S45HN09C	80	27	50	12.4	7			
80A08R-S45HN09C	80	27	50	12.4	7			
100A06R-S45HN09C	100	32	50	14.4	8			
100A08R-S45HN09C	100	32	50	14.4	8			
125A06R-S45HN09C	125	40	63	16.4	9.5			
125A08R-S45HN09C	125	40	63	16.4	9.5			
125A10R-S45HN09C	125	40	63	16.4	9.5			
160C08R-S45HN09C	160	40	63	16.4	9.5			
160C10R-S45HN09C	160	40	63	16.4	9.5			
160C12R-S45HN09C	160	40	63	16.4	9.5			
200C12R-S45HN09C	200	60	63	25.7	14			
250C14R-S45HN09C	250	60	63	25.7	14			
315C16R-S45HN09C	315	60	80	25.7	14			

圆型铣刀
Disc Cutter

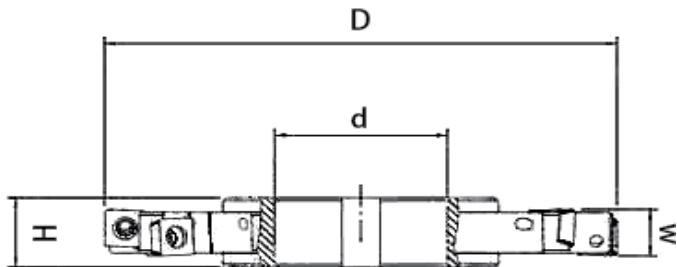



技术参数/Technical Parameters

类型 Type	圆型铣刀 Disc Cutter	加工范围 Working Scope	80~200mm
螺丝 Screw	M2.5	中心孔尺寸 Center Hole Size	27~50mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	MPHT06、08、12



规格 Specification	尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	W	T			
SMP03-080x8-K27-MP06-10	80	27	8	10	MPHT060304	M2.5	T8
SMP03-100x8-K32-MP06-14	100	32	8	14			
SMP03-100x10-K32-MP06-14	100	32	10	14			
SMP03-125x10-K40-MP06-16	125	40	10	16			
SMP03-125x12-K40-MP08-12	125	40	12	12	MPHT080305		
SMP03-160x12-K40-MP08-14	160	40	12	14			
SMP03-160x16-K40-MP12-12	160	40	16	12	MPHT120408		
SMP03-160x18-K40-MP12-12	160	40	18	12			
SMP03-160x20-K40-MP12-12	160	40	20	12			
SMP03-200x16-K50-MP12-14	200	50	16	14			
SMP03-200x18-K50-MP12-14	200	50	18	14			
SMP03-200x20-K50-MP12-14	200	50	20	14			



T型铣刀
T Type Milling Cutter

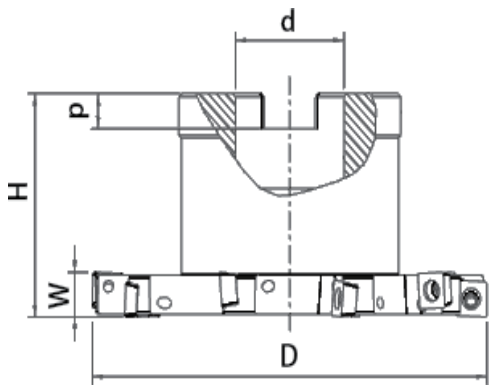

技术参数/Technical Parameters

类型 Type	T型铣刀 T Type Milling Cutter	加工范围 Working Scope	80~200mm
螺丝 Screw	M2.5	中心孔尺寸 Center Hole Size	22~40mm
材质 Material	特殊合金钢 Special Alloy Steel	适用刀粒 Inserts	MPHT06、08、12

AP16方肩铣刀盘
AP16 Shoulder Milling Cutterhead

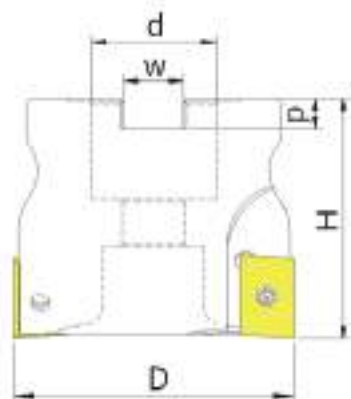

技术参数/Technical Parameters

类型 Type	AP16方肩铣刀盘 AP16 Shoulder Milling Cutterhead	加工范围 Working Scope	40~250mm
螺丝 Screw	M4	中心孔尺寸 Center Hole Size	22~60mm
材质 Material	航空铝 Aviation aluminum	适用刀粒 Inserts	APKT1604
角度 Angle	90°	刃数 Flutes	4~10T

规格 Specification	尺寸 Measure				刀粒 Inserts	螺丝 Screw	扳手 Wrench
	D	d	W	T			
SMP03-080x8-A22-MP06-10	80	22	8	10	MPHT060304	M2.5	T8
SMP03-100x8-A27-MP06-14	100	27	8	14			
SMP03-100x10-A27-MP06-14	125	27	10	14			
SMP03-125x10-A32-MP06-16	125	32	10	16			
SMP03-125x12-A32-MP08-12	125	32	12	12	MPHT080305		
SMP03-160x12-B40-MP08-14	160	40	12	14			
SMP03-200x12-C40-MP08-18	200	40	12	18			
SMP03-125x16-A32-MP12-10	125	32	16	10	MPHT120408		
SMP03-160x16-B40-MP12-12	160	40	16	12			
SMP03-160x18-B40-MP12-12	160	40	18	12			
SMP03-200x16-C40-MP12-14	200	40	16	14			
SMP03-200x18-C40-MP12-14	200	40	18	14			
SMP03-200x20-C40-MP12-14	200	40	20	14			

规格 Specification	尺寸 Measure					刀粒 Insert	螺丝 Screw	扳手 Wrench
	D	d	H	W	P			
40-22-4T	40	22	50	10.4	6.3	APKT1604	M4	T15
50-22-4T	50	22	50	10.4	6.3			
63-22-4T	63	22	50	10.4	6.3			
80-22-6T	80	22	50	12.4	7			
80-27-6T	80	27	50	12.4	7			
100-22-6T	100	22	50	14.4	8			
100-27-6T	100	27	50	14.4	8			
100-32-6T	100	32	50	14.4	8			
125-22-6T	125	22	50	16.4	8			
125-27-6T	125	27	50	16.4	8			
125-32-6T	125	32	50	16.4	8			
125-40-6T	125	40	50	16.4	8			
160-32-8T	160	32	50	16.4	9			
160-40-8T	160	40	50	16.4	9			
200-40-10T	200	40	63	16.4	9			
250-60-10T	250	60	63	16.4	9			